


Meter Main With Load Center

100-200 Amp | 4 Terminal | Ringless | 120/240 VAC



U5168-XTL-200

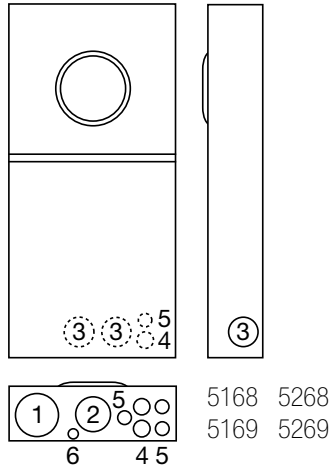

U5268-XTL-200-KK

100-200 Amp – 4 Terminal – Meter Mains – 1Ø3W – Ringless

Catalog Number	Circuits	Service	Hub	Connectors CU/AL - Line	Bypass	Dimensions			Knockouts					
						D"	W"	H"	1	2	3	4	5	6
U5168-XTL-100	10	OH/UG	C.P.	#6-350	None	4½	14⅞	32	3	2½	2	1	½,¾	¼,½
U5168-XTL-100-KK	10	OH/UG	C.P.	#6-350	Horn	4½	14⅞	32	3	2½	2	1	½,¾	¼,½
U5168-XTL-200	8	OH/UG	C.P.	#6-350	None	4½	14⅞	32	3	2½	2	1	½,¾	¼,½
U5168-XTL-200-KK	8	OH/UG	C.P.	#6-350	Horn	4½	14⅞	32	3	2½	2	1	½,¾	¼,½
U5268-XTL-200	20	OH/UG	C.P.	#6-350	None	4½	14⅞	32	3	2½	2	1	½,¾	¼,½
U5268-XTL-200-KK	20	OH/UG	C.P.	#6-350	Horn	4½	14⅞	32	3	2½	2	1	½,¾	¼,½

Notes

- **Hubs:** Supplied with two closing plates packed inside. Order hubs as a separate item. For proper hub selection, refer to the hub suffix chart on the accessories page.
- **Fifth Terminal:** For field installed fifth terminal, order **K5T**.
- **Breakers:** Rated 22K AIC with Milbank **QNR2200H** main installed.
- **Main Breaker:** **U5168** also available with 100-150 amp breakers, consult factory.
- **Sub Feed Lugs:** #6-350 sub feed lugs provided on 8 circuit interior. **Not available on 20 circuit interior.**
- **Main Lug Kit:** For main lug kit for the **U5268**, order **K3701**.

Generator Interlock

	K5815 Large QN with small frame Q	K5820 Large frame QN with large frame QN	K5830 Small frame Q to small frame Q
--	---	--	--