


Single Position Lever Bypass


320 Amp | 7 Terminal | Ringless | 600 VAC




U4013-X

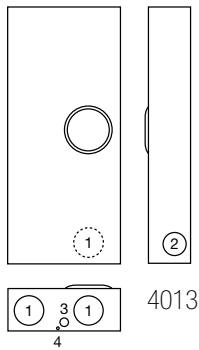

U2594-X

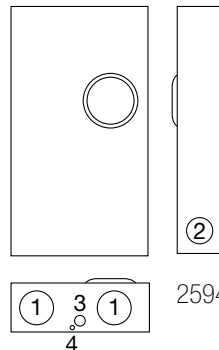

U2120-X

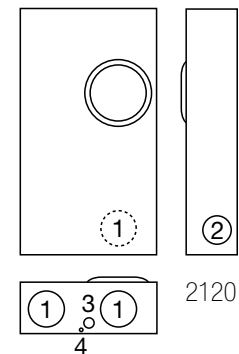

320 Amp – Meter Mains – Lever Bypass – Ringless

| Catalog Number | Service | Hub | Connectors CU/AL | | Bypass | Dimensions | | | Knockouts | | | |
|----------------|---------|------|------------------|-----------------|--------|------------|-----|-----|-----------|---|---|---|
| | | | Line | Load | | D" | W" | H" | 1 | 2 | 3 | 4 |
| U4013-X | OH/UG | C.P. | 3/8" x 16 Studs | 3/8" x 16 Studs | Lever | 6½ | 17¾ | 40½ | 4 | 3 | 1 | ¼ |
| U2594-X | OH/UG | C.P. | 3/8" x 16 Studs | 3/8" x 16 Studs | Lever | 6½ | 19 | 34⅝ | 4 | 3 | 1 | ¼ |
| U2120-X | UG | C.P. | 3/8" x 16 Studs | 3/8" x 16 Studs | Lever | 6½ | 17¾ | 31¾ | 4 | 3 | 1 | ¼ |

Notes

- **Hubs:** For proper hub selection, see the hub suffix chart on the accessory page.
- **Connectors:** Units are supplied with 3/8" - 16 hex head nuts with Belleville washers. For connector lug kits, order as extra from chart on accessory page. Separate lug kits are required for line and load.
- **Bypass:** Lever supplied clamping action on meter spades and also operates bypass device.
- **Isolated Neutral Kit:** For field-installed isolated neutral kit for **U4013**, **U2594**, and **U2120** order catalog number **K5977**.

