Milwaukee

SERVICE PARTS LIST

BULLETIN NO. 54-06-2360

SPECIFY CATALOG NO. AND SERIAL NO. WHEN ORDERING PARTS

2361-20

CORDLESS M18™ LED FLOODLIGHT

STARTING

SERIAL NO.

F47A

REVISED BULLETIN DATE Dec. 2015 WIRING INSTRUCTION

EXAMPLE:

00 Tomponent Parts (Small #) Are Included When Ordering The Assembly (Large #).


CATALOG NO.

Model 2361-20 Cordless M18™ LED Floodlight (Serial Break 'A') is designed to operate off of two different 18 volt battery systems:

M18™ Compact REDLITHIUM™ 1.5 amp-hour battery 48-11-1815

M18™ XC 48-11-1828 3.0 amp-hour battery

To power a 2361-20 Cordless M18™ LED Floodlight with a 48-11-1890 M18™ REDLITHIUM™ 9.0 amp-hour battery, Hang Bar 31-01-1586 must be installed (to replace the existing Hang Bar 31-01-1585) onto serial break 'A' tools to accomodate the larger size battery larger size battery.

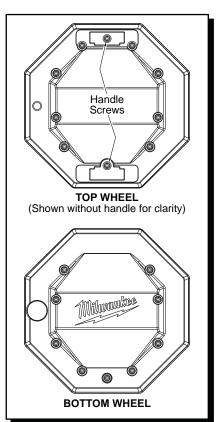

 $10^{\frac{1}{2}}$

1(4x)

2

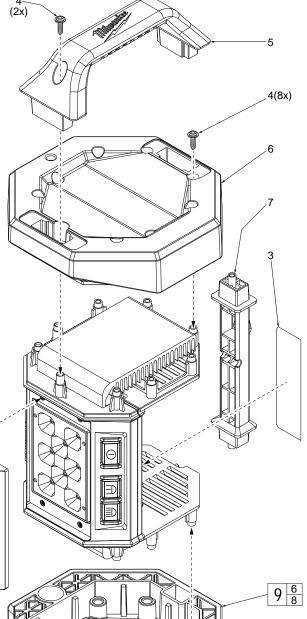


FIG. NOTES

- Care must be used when securing screws (1) in tool. 1,2 To prevent damage to the lens assembly (2) do not over tighten. It is not recommended to use power tools, hand tighten only. Torque screws to 3-4 in/lbs (3.5-4.5 kg/cm).
- A clean, dry surface is essential for proper performance for any adhesive system. The area intended for application of any adhesive label or nameplate must be prepared by cleaning with isopropyl alcohol. The solvent is to be applied with a clean, lint free applicator and the surface allowed to dry before applying the label or nameplate.
- NOTE: As an aid to reassembly, do not attempt to install the top or bottom wheels with screws in the screw cavities. Be sure the wheels are squarely and firmly seated prior to securing with the fasteners.
- Care must be used when securing housing screws (4) in tool. To prevent damage to the main housing, be sure the pointed tip of the fasteners are in the screw boss holes and that the screw is perpendicular to the bosses. It is not recommended to use power tools, hand tighten only. Torque screws to 8-10.5 in/lbs (9.5-12 kg/cm).

FIG.	PART NO.	DESCRIPTION OF PART	NO. REQ.
1	05-81-0625	M3 x 8mm Pan Hd. T-10 Screw	(4)
2		Lens Assembly	(1)
3	12-20-2361	Service Nameplate	(1)
4	06-82-0022	M3.5 x 8mm Pan Hd. Washer Plast. T-10) Sc (19)
5	31-44-0995	Top Handle	(1)
6		Top Wheel	(1)
7	31-01-1585	Hang Bar	(1)
8		Bottom Wheel	(1)
9	31-70-2361	Wheel Kit	(1)
10	44-06-0240	Lens Assembly Kit	(1)

4(9x)