


TRAP PRIMER FOR EXPOSED, TOP SPUD TOILET FLUSH VALVES

MODEL NUMBER:

G065.830.002 Trap Primer
For exposed, top spud toilet flush valves.
(1.1, 1.27 and 1.6 qpf)

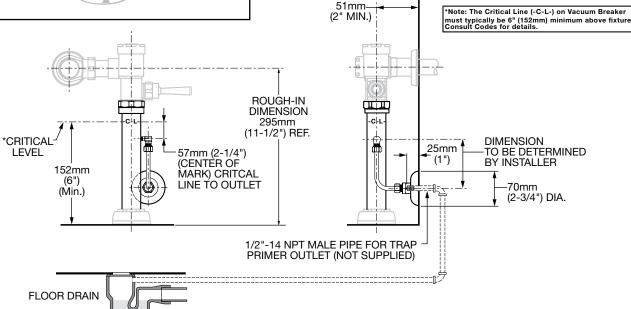

FINISHED WALL-

GENERAL DESCRIPTION:

Durable brass construction. Trap primer diverts a small amount of water from each flush to the floor drain to maintain a constant water seal, preventing sewer gases from escaping into the air. Water Deflector controls the amount of water diverted to the drain. Piping from trap primer to floor drain by other.

PRODUCT FEATURES:

- Durable brass construction.
- Diverter controls the amount of water diverted to the floor drain.
- Excellent flushing performance at 1.1, 1.28 & 1.6 gpf when installed with an American Standard flushometer valve & bowl.
- Includes vacuum breaker, down tube, diverter, 3/8" elbow coupling and flexible tube from trap primer to wall.
- Includes wall flange and coupling kit to connect tubing to 1/2" NPT pipe.

PART OF LIXIL

© 2020 AS America Inc. 6/20