

Fig. CT-138R

Extension Split Tubing Clamp (Rod Threaded)

Size Range: 1/2" through 2"

Material: Malleable iron

Finish: Copper plated

Service: Recommended for suspension of non-insulated **stationary** copper tube.

Approvals: Complies with Federal Specification A-A-1192A (Type 12) WW-H-171-E (Type 25), ANSI/MSS SP-69 and MSS SP-58 (Type 12).

Installation:

- Permanent installation of clamp may be made before the tubing is placed in position.
- Final installation is attained by swinging the lower portion of the hinged clamp up under the tubing and inserting a single screw securely.

Features:

- Hinged design provides for economical installation.
- Designed to provide a tight fit on copper tubing.

Ordering: Specify nominal tube size, figure number, name.

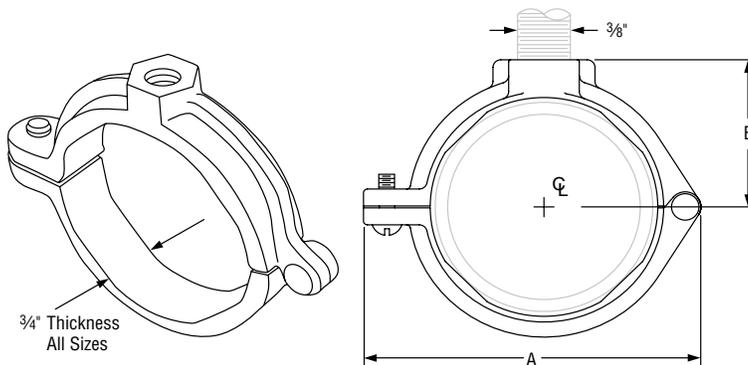


FIG. CT-138R: LOADS (LBS) • WEIGHT (LBS) • DIMENSIONS (IN)				
Tube Size	Max Load	Weight	A	B
1/2	180	0.10	2	3/4
3/4		0.12	2 1/4	7/8
1		0.14	2 1/2	1
1 1/4		0.18	2 7/8	1 1/8
1 1/2		0.22	3 1/4	1 1/4
2		0.36	4	1 9/16

PROJECT INFORMATION		APPROVAL STAMP	
Project:		<input type="checkbox"/> Approved	
Address:		<input type="checkbox"/> Approved as noted	
Contractor:		<input type="checkbox"/> Not approved	
Engineer:		Remarks:	
Submittal Date:			
Notes 1:			
Notes 2:			