





Arrow-Breaker® Frost-Free Hydrants with Patented Integrated (Built-in) Anti-Siphon Vacuum Breaker Technology (460 Series)

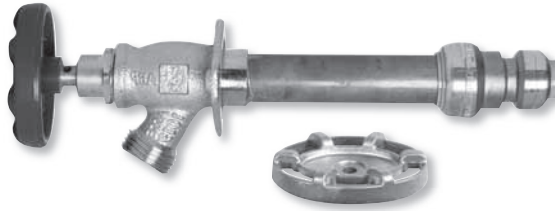

New Bronze Handle Option

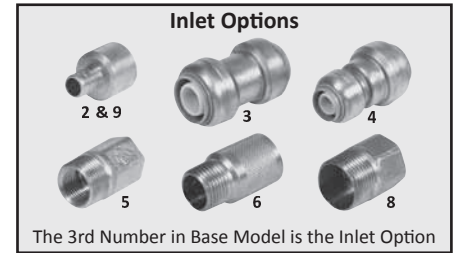

460 Series

BASE MODEL	DESCRIPTION (Specify Length- 2", 4", 6", 8", 10", 12", 14")
462"xx"BCLD	Arrow-Breaker® Anti-Siphon Frost-Free Hydrant, WIRSBO® WPX
463"xx" BCLD	3/4" Push-Fit Arrow-Breaker® Anti-Siphon Frost-Free Hydrant
464"xx"BCLD	1/2" Push-Fit Arrow-Breaker® Anti-Siphon Frost-Free Hydrant
465"xx"BCLD	1/2" FIP or 3/4" MIP Arrow-Breaker® Anti-Siphon Frost-Free Hydrant
466"xx"BCLD	1/2" Copper Sweat or 1/2" MIP Arrow-Breaker® Anti-Siphon Frost-Free Hydrant
468"xx"BCLD	3/4" Copper Sweat or 3/4" MIP Arrow-Breaker® Anti-Siphon Frost-Free Hydrant
469"xx"BCLD	PEX Arrow-Breaker® Anti-Siphon Frost-Free Hydrant


- Arrow-Breaker® Frost Proof Hydrants feature a patented integrated (Built-in) Anti-Siphon Vacuum Breaker eliminating the need for "thread-on" type devices that restrict flow.
- Specify Length "xx" - Standard Length up to 14" (longer lengths available by Special Order).
- Exclusive O-Ring Bonnet (No Packing Nut).
- ASSE 1019A and IAPMO Listed.
- Add BZ for Bronze Handle Option.
- Add QT after Base Model for QuickTurn™ option, for other options, use Base Model number and add desired suffix from Legend.



Frost-Free Self-Draining Hydrant with Thread-on Vacuum Breaker (480BFP Series)



New Bronze Handle Option

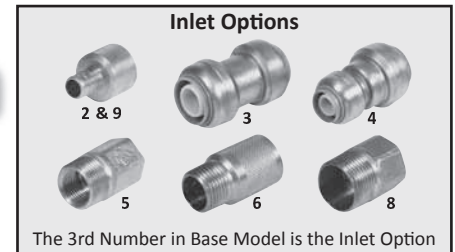

480 Series

BASE MODEL	DESCRIPTION (Specify Length- 2", 4", 6", 8", 10", 12", 14")
482BFP"xx"BCLD	Self-Draining Anti-Siphon Frost-Free Hydrant, WIRSBO® WPX
483BFP"xx"BCLD	3/4" Push-Fit Self-Draining Anti-Siphon Frost-Free Hydrant
484BFP"xx"BCLD	1/2" Push-Fit Self-Draining Anti-Siphon Frost-Free Hydrant
485BFP"xx"BCLD	Self-Draining Anti-Siphon Frost-Free Hydrant 1/2" FIP or 3/4" MIP
486BFP"xx"BCLD	Self-Draining Anti-Siphon Frost-Free Hydrant 1/2" Copper Sweat or 1/2" MIP
488BFP"xx"BCLD	Self-Draining Anti-Siphon Frost-Free Hydrant 3/4" Copper Sweat or 3/4" MIP
489BFP"xx"BCLD	Self-Draining Anti-Siphon Frost-Free Hydrant PEX

- This valve has less parts and still incorporates our factory installed vacuum breaker and self-draining features.
- Specify Length "xx" - Standard Length up to 14" (longer lengths available by Special Order).
- Exclusive O-Ring Bonnet (No Packing Nut).
- ASSE 1019A and IAPMO listed.
- New Rubberized Coated Handle.
- Add QT after Base Model for QuickTurn™ option, for other options, use Base Model number and add desired suffix from Legend.

