


For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

OCR1912A/ OCR1915A/ OCR1920A Copper Faucet Supply Kit - Multi-Turn Compression Angle Stop

Use: For use with water in accessible locations only. Not intended for recirculating water systems that produce continuous use temperatures above 115° F. For those applications, use our KT™ series ball stop supply kits.

Design Features:

- **Everything you need.** These kits combine our trusted BrassCraft® supply stop, copper riser, and escutcheon for an easy-to-install connection
- **100% compliant** 

Copper riser provides:

- **One-piece** construction
- **Cut-to-length** for a clean, professional installation

Multi-Turn stop provides:


- **Machined one-piece brass body** provides strength, durability, and long-lasting performance
- **Oval knurled handle** provides a secure grip and smooth on/off operation
- **Easy-to-remove handle** helps protect against accidental stop operation during rough-ins

Operating Specifications:

Temperature: 40° - 140° F

Pressure: 125 PSI maximum

Tubing Diameter: 3/8" OD

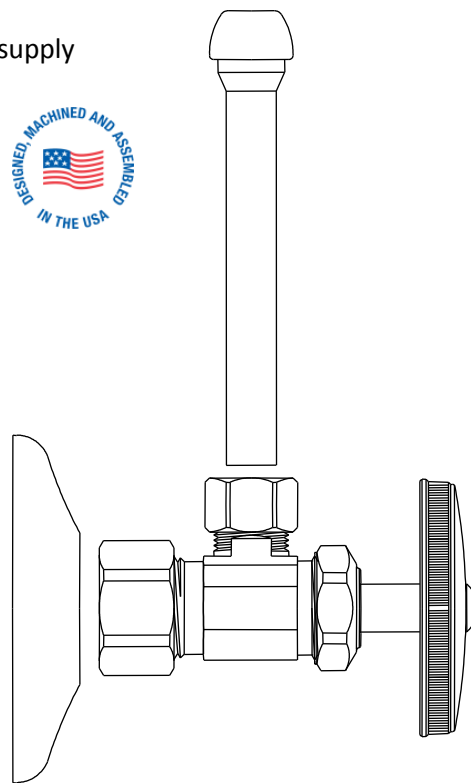

Standard

CONNECTOR MATERIAL SPECIFICATIONS	
Tube	Copper or copper, chrome plated
Insert	POM

Compliant

CONNECTOR MATERIAL SPECIFICATIONS	
Tube	Copper or copper, chrome plated
Insert	POM

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg if requested.

BrassCraft®

OCR1912A/ OCR1915A/ OCR1920A Copper Faucet Supply Kit - Multi-Turn Compression Angle Stop

Standard

STOP MATERIAL SPECIFICATIONS	
Body	Brass or brass, chrome plated
Stem	POM; brass; or brass, chrome plated
Handle	Zinc die cast, plated; ABS, plated; or Polycarbonate
Handle Screw	Steel, zinc plated
Bib & Packing Washer	Rubber
Packing Nut	Brass or brass, chrome plated
Loose Key	Zinc die cast
Loose Key Stem	Brass, chrome plated
Lock Shield	Brass, chrome plated
Escutcheon	Stainless steel

Compliant

STOP MATERIAL SPECIFICATIONS	
Body	Compliant brass or Compliant brass, chrome plated
Stem	POM; Compliant brass; or Compliant brass, chrome plated
Handle	Zinc die cast, plated; ABS, plated; or Polycarbonate
Handle Screw	Steel, zinc plated
Bib & Packing Washer	Rubber
Packing Nut	Brass or brass, chrome plated
Loose Key	Zinc die cast
Loose Key Stem	Brass, chrome plated
Lock Shield	Compliant brass or Compliant brass, chrome plated
Escutcheon	Stainless steel

Standard Part Listing:

- | | |
|--------------------------------------|--|
| <input type="checkbox"/> OCR1912A C | 1/2" nom compression x 3/8" OD compression stop with 3/8" OD tube x 11-1/2" length riser & shallow escutcheon, chrome plated |
| <input type="checkbox"/> OCR1912A R | 1/2" nom compression x 3/8" OD compression stop with 3/8" OD tube x 11-1/2" length riser & shallow escutcheon, rough finish |
| <input type="checkbox"/> OCR1912AZ C | 1/2" nom compression x 3/8" OD compression stop, brass stem with 3/8" OD tube x 11-1/2" length riser & shallow escutcheon, chrome plated |
| <input type="checkbox"/> OCR1915A C | 1/2" nom compression x 3/8" OD compression stop with 3/8" OD tube x 14-1/2" length riser & shallow escutcheon, chrome plated |
| <input type="checkbox"/> OCR1920A C | 1/2" nom compression x 3/8" OD compression stop with 3/8" OD tube x 19-1/2" length riser & shallow escutcheon, chrome plated |
| <input type="checkbox"/> OCR1920AZ C | 1/2" nom compression x 3/8" OD compression stop, brass stem with 3/8" OD tube x 19-1/2" length riser & shallow escutcheon, chrome plated |
| <input type="checkbox"/> OCR1920AZ R | 1/2" nom compression x 3/8" OD compression stop, brass stem with 3/8" OD tube x 19-1/2" length riser & shallow escutcheon, rough finish |
| <input type="checkbox"/> OCR1920A BZ | 1/2" nom compression x 3/8" OD compression stop with 3/8" OD tube x 19-1/2" length riser & shallow escutcheon, oil rubbed bronze |
| <input type="checkbox"/> OCR1920A NS | 1/2" nom compression x 3/8" OD compression stop with 3/8" OD tube x 19-1/2" length riser & shallow escutcheon, satin nickel |
| <input type="checkbox"/> SCR1912A C | 1/2" nom compression x 3/8" OD compression stop with 3/8" OD tube x 11-1/2" length riser & shallow escutcheon, loose key, chrome plated |
| <input type="checkbox"/> SCR1915A C | 1/2" nom compression x 3/8" OD compression stop with 3/8" OD tube x 14-1/2" length riser & shallow escutcheon, loose key, chrome plated |
| <input type="checkbox"/> SCR1920A C | 1/2" nom compression x 3/8" OD compression stop with 3/8" OD tube x 19-1/2" length riser & shallow escutcheon, loose key, chrome plated |
| <input type="checkbox"/> STCR1920A C | 1/2" nom compression x 3/8" OD compression stop with 3/8" OD tube x 19-1/2" length riser & shallow escutcheon, loose key, stuffing box, lock shield, chrome plated |

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg if requested.




BrassCraft®

OCR1912A/ OCR1915A/ OCR1920A Copper Faucet Supply Kit - Multi-Turn Compression Angle Stop

Compliant Part Listing:

<input type="checkbox"/>	OCR1912AX C	1/2" nom compression x 3/8" OD compression stop with 3/8" OD tube x 11-1/2" length riser & shallow escutcheon, chrome plated
<input type="checkbox"/>	OCR1912AZX C	1/2" nom compression x 3/8" OD compression stop, brass stem with 3/8" OD tube x 11-1/2" length riser & shallow escutcheon, chrome plated
<input type="checkbox"/>	OCR1915AX C	1/2" nom compression x 3/8" OD compression stop with 3/8" OD tube x 14-1/2" length riser & shallow escutcheon, chrome plated
<input type="checkbox"/>	OCR1920AX C	1/2" nom compression x 3/8" OD compression stop with 3/8" OD tube x 19-1/2" length riser & shallow escutcheon, chrome plated
<input type="checkbox"/>	SCR1912AX C	1/2" nom compression x 3/8" OD compression stop with 3/8" OD tube x 11-1/2" length riser & shallow escutcheon, loose key, chrome plated
<input type="checkbox"/>	SCR1915AX C	1/2" nom compression x 3/8" OD compression stop with 3/8" OD tube x 14-1/2" length riser & shallow escutcheon, loose key, chrome plated
<input type="checkbox"/>	SCR1920AX C	1/2" nom compression x 3/8" OD compression stop with 3/8" OD tube x 19-1/2" length riser & shallow escutcheon, chrome plated

PART DIMENSIONS (Inches)			
Model	DIM. A	DIM. B	DIM. C
OCR1912A /AZ	12.0	1.16	2.84
OCR1915A	15.0	1.16	2.84
OCR1920A /AZ	20.0	1.16	2.84
SCR1912A	12.0	1.20	2.64
SCR1915A	15.0	1.20	2.64
SCR1920A	20.0	1.20	2.64
STCR1920A	20.0	1.20	3.03

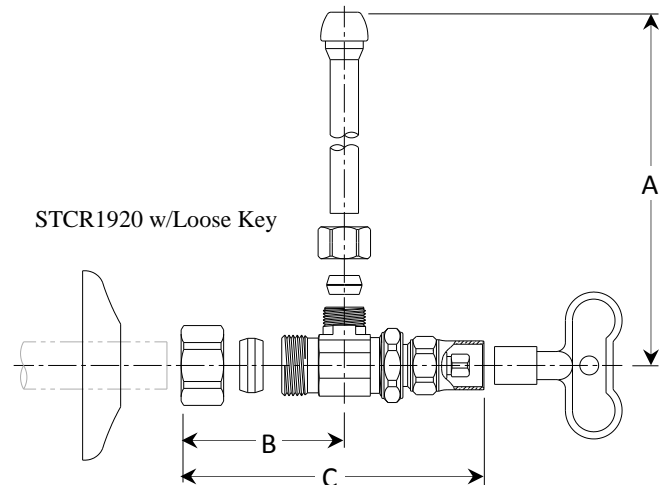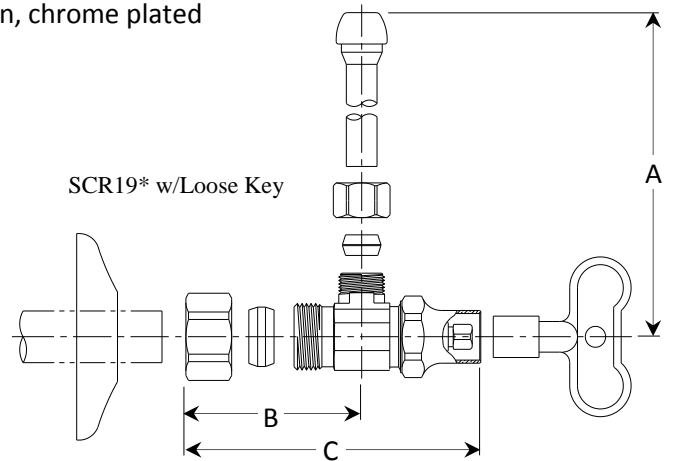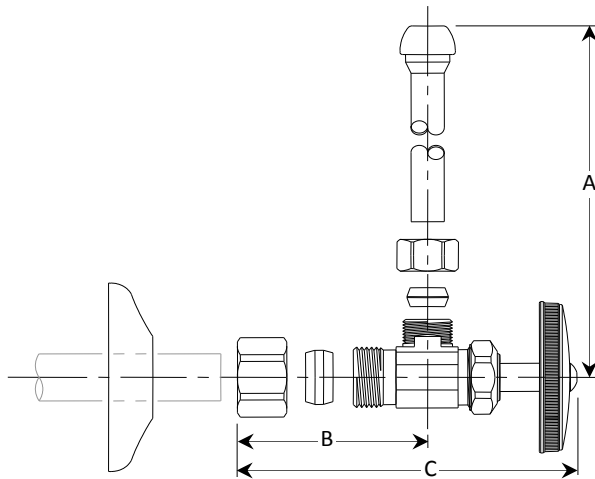

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (File # 0645)
- CSA listed to ASME A112.18.1 / CSA B125.1 (File # 204593)
- Compliant product CSA listed to Low Lead Content Certification Program – Plumbing Products Class 6853-01



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg if requested.

BrassCraft