



Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____


5" VERTICAL IC COMPACT FLUORESCENT HOUSING

18W COMPACT FLUORESCENT LAMP

ICPL5 18W E



PRODUCT DESCRIPTION

ICPL, Air-Loc® single-wall construction housing • Can be completely covered with insulation • When used with Air-Loc Gasket (see accessories), stops infiltration and exfiltration of air, reducing heating and air cooling costs • Trims shown with Air-Loc symbol  do not require a gasket • Easy access ballast • 2 year warranty.

PRODUCT SPECIFICATIONS

Lamp One 18W Triple Tube (4-pin) CFL lamp.

Socket Supplied with spring to accommodate certain trim installations, or can be attached to top of housing for certain trims.

Ballast 120V HPF Rapid Start Electronic with end-of-life lamp protection • UL listed/CSA certified • Mounted between j-box and housing for ease of maintenance.

Trims Trim selection shown on reverse.

Labels UL listed for through-branch wiring and damp locations • Meets Washington State Air Tight Requirements, IECC • Complies with FCC Part 18 consumer use limits • Product mechanically protected against improper use of lamps • Union made • UL and C-UL Listed • Meets the high efficacy requirements of California's Title 24 energy code • Trims 210N, 2130 and 5101 are wet location approved for covered ceiling applications.

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Specifications subject to change without notice.

INSTALLATION

Real Nail® 3 Bar Hangers Telescoping, Patented (US Patent D552,969) Real Nail® 3 system permits quick placement of housing anywhere within 24" O.C. joists or suspended ceilings • Integral T-bar notch and clip secures housing in suspended ceiling grid – no accessory clips required • 24" expansion stop allows quick placement of fixture in standard grid spacing • Bars scored in two locations for fast, clean breaking, allowing housing installation in tight applications • Bars captive to mounting frame • Edge-mounted for extra strength • Captive bugle-headed ring shank nail for quick one-step installation and easy removal with claw hammer for fixture relocation • Quick-Loc slot and oversized locking set screw lock fixture in position • Bar hanger foot contoured to align to bottom of construction joist • Alternate mounting holes included.

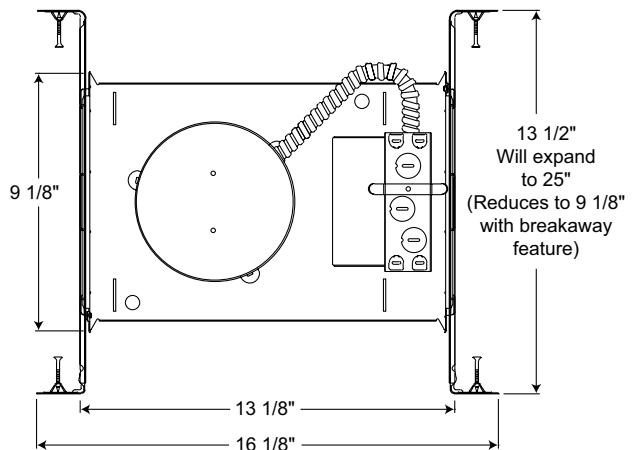
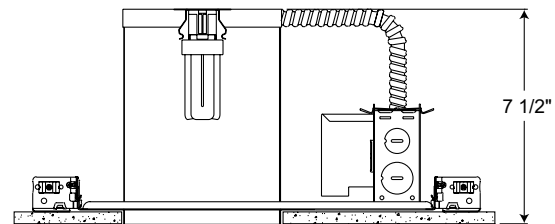
Junction Box Pre-wired junction box provided with (5) ½" and (1) ¾" knockouts, (4) Non-metallic sheathed cable connectors and ground wire, UL and C-UL Listed for through-branch wiring, maximum (8) No. 12 AWG 90° C branch circuit conductors (4 in, 4 out) • Junction box provided with removable access plates • Knockouts equipped with pryout slots.

Mounting Frame 22-gauge die-formed galvanized steel mounting frame • Rough-in section (junction box, mounting frame, housing ballast and bar hangers) fully assembled for ease of installation.

Housing IC housing, .032" aluminum sealed for Air-Loc • Housing is vertically adjustable to accommodate up to a 1" ceiling thickness.

DIMENSIONS

AIR-LOC



5 5/8" CEILING CUTOUT

ACCESSORIES

Catalog No.	Description
ALG5	Air-Loc Gasket

To order, specify catalog number.

PRODUCT CODES











Catalog Number	Input Voltage	Lamp Rating
ICPL5 18W E	5" CFL Non-IC Remodel 120V	18W Triple Tube (4-Pin) CFL

Housing and trim can be ordered together or separate, but will always ship separately.

5" VERTICAL IC COMPACT FLUORESCENT HOUSING

18W COMPACT FLUORESCENT LAMP ICPL5 18W E

TRIMS/LAMPS

	Cat. No.	Description	Lamp Rating
 	210N ABZ ♦	5" Lensed Flat Glass Shower Trim - Classic Aged Bronze	18W Triple Tube (4-pin) CFL
	210N SC ♦	5" Lensed Flat Glass Shower Trim - Satin Chrome	
	210N WH ♦	5" Lensed Flat Glass Shower Trim - White	
	215 BWH	5" Downlight Enclosed Baffle Trim - Black Baffle, White Trim Ring	18W Triple Tube (4-pin) CFL
	215 WWH	5" Downlight Enclosed Baffle Trim - White Baffle, White Trim Ring	
	216 CWH	5" Downlight Enclosed Cone Trim - Clear Alzak® Cone, White Trim Ring	18W Triple Tube (4-pin) CFL
	216 GWH	5" Downlight Enclosed Cone Trim - Gold Cone, White Trim Ring	
	216 HZWH	5" Downlight Enclosed Cone Trim - Haze Cone, White Trim Ring	
	216 WHZWH	5" Downlight Enclosed Cone Trim - Wheat Haze Cone, White Trim Ring	
	216 WWH	5" Downlight Enclosed Cone Trim - White Cone, White Trim Ring	
	218 BWH	5" Downlight Reflector with Baffle Trim - Black Baffle, White Trim Ring	18W Triple Tube (4-pin) CFL
	218 WWH	5" Downlight Reflector with Baffle Trim - White Baffle, White Trim Ring	
	219 CWH	5" Downlight Reflector Trim - Clear Alzak®, White Trim Ring	18W Triple Tube (4-pin) CFL
	219 HZSC	5" Downlight Reflector Trim - Haze, Satin Chrome Trim	
	219 HZWH	5" Downlight Reflector Trim - Haze, White Trim Ring	
	219 WHZWH	5" Downlight Reflector Trim - Wheat Haze, White Trim Ring	
	219 WHZABZ	5" Downlight Reflector Trim - Wheat Haze, Classic Aged Bronze Trim Ring	
 	2130 BWH ♦	5" Lensed Baffle with Regressed Frosted Dome Lens Trim - Black Baffle, White Trim Ring	18W Triple Tube (4-pin) CFL
	2130 WWH ♦	5" Lensed Baffle with Regressed Frosted Dome Lens Trim - White Baffle, White Trim Ring	
 	5101 ABZ ♦	5" Lensed Beveled Frame with Frosted Dome Lens Trim - Classic Aged Bronze	18W Triple Tube (4-pin) CFL
	5101 SC ♦	5" Lensed Beveled Frame with Frosted Dome Lens Trim - Satin Chrome	
	5101 WH ♦	5" Lensed Beveled Frame with Frosted Dome Lens Trim - White	

Trim Size: 6 1/4" O.D., 5101 is 6 1/2" O.D.

Alzak is a registered trademark of Alcoa Corp.

Note: In Canada when insulation is present, Type IC fixtures must be used.

AIR-LOC JUNO IC housings meet IECC Energy Code requirements per ASTM E283.

Air-Loc® rated trims are pre-gasketed for minimum air leakage with IC housings.

♦ UL Listed for use in wet location.