

FEATURES & SPECIFICATIONS

INTENDED USE

Provides years of maintenance-free general illumination for residential and commercial outdoor applications such as yards, driveways, patios, loading areas and warehouses. Motion activation deters intruders.

CONSTRUCTION

Three tool-free adjustable heads allow for easy aiming up/down or side to side.

Rugged cast aluminum, corrosion-resistant housing in bronze or white.

Clear acrylic lenses are fully gasketed to keep out moisture, dirt and bugs.

120V driver operates at 60Hz.

Rated for outdoor installations, -40°C minimum ambient.

OPTICS

High-performance 5000K CCT LEDs produce 2063 lumens and maintain 70% of light output at 50,000 hours of service. (Nominal correlated color temperature per ANSI C78-377-2008; LED lifespan based on IESNA LM-80-08 results and calculated per IESNA TM-21-11 methodology.)

Dual array motion sensor provides 180° detection with up to 70 feet forward range, and additional downward perimeter protection for added security.

Sensitivity and on-time adjustable knobs provide precision control, and the sensor has a manual override option.

An integrated photocell prevents activation during daylight.

INSTALLATION

Mounts easily to existing junction box on wall or under building eave.

Adjustable heads allow precise illumination.

Not recommended to wire multiple fixtures in parallel.

LISTINGS

UL/C-UL Certified to US and Canadian safety standards. Wet location listed for mounting higher than 4' off the ground.


WARRANTY

Five-year limited warranty. Full warranty terms located at

www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx.

NOTE: Specifications are subject to change without notice.

Actual performance may differ as a result of end-user environment and application.

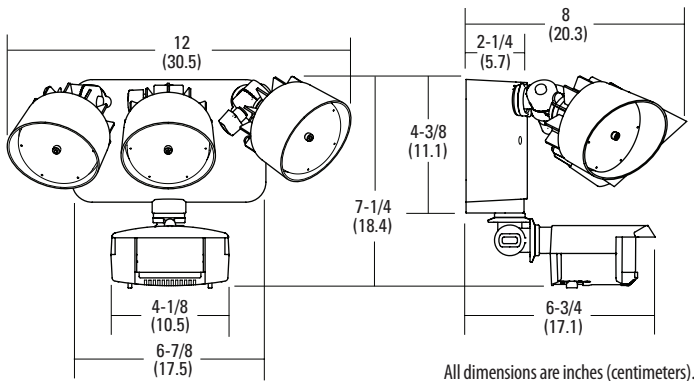

Catalog Number
Notes
Type

Outdoor General Purpose

OFLR 9 MO

LED FLOODLIGHT WITH MOTION SENSOR
3 ADJUSTABLE HEADS

High Performance LED



ORDERING INFORMATION

All configurations of this product are considered "standard" and have short lead times.

Example: OFLR 9LN 120 MO BZ

OFLR	9LN	120	MO	
Series	Number of LEDs	Voltage	Features	Finish
OFLR LED floodlight	9LN 9 LEDs, 3 heads	120 120 volts	MO Motion sensor	BZ Bronze WH White

3-Head LED Floodlight with Motion Sensor

PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.

LED

lighting facts[®]

A Program of the U.S. DOE

Lithonia Lighting

Light Output (Lumens)	2163
Watts	32.5
Lumens per Watt (Efficacy)	66

Color Accuracy	71
Color Rendering Index (CRI)	

Light Color

Correlated Color Temperature (CCT)

5238 (Daylight)

Warm White

Bright White

Daylight

2700K

3000K

4500K

6500K

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: NJSM-ZPWLSN (9/18/2012)
Model Number: OFLR 9LN 120 MO
Type: Other