

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

AU2 Male Gas Adapter - Male Flare x Male Iron Pipe

Use: For use with natural, manufactured, mixed, liquefied petroleum gases and LP gas-air mixtures.


Operating Specifications:

Temperature: -40° to 150° F

Pressure: Up to 1/2 psi maximum

MATERIAL SPECIFICATIONS	
Brass Fittings	C36000 brass
Steel Fittings	Blue zinc plated 12L14 or 1010 steel

PART DIMENSIONS (Inches)			
Model	DIA. A	DIM. B	DIM. C
AU2-8	0.438	1.81	7/8
AU2-8-6	0.438	1.61	3/4
AU2-6-8	0.312	1.78	7/8
AU2-6	0.312	1.55	11/16

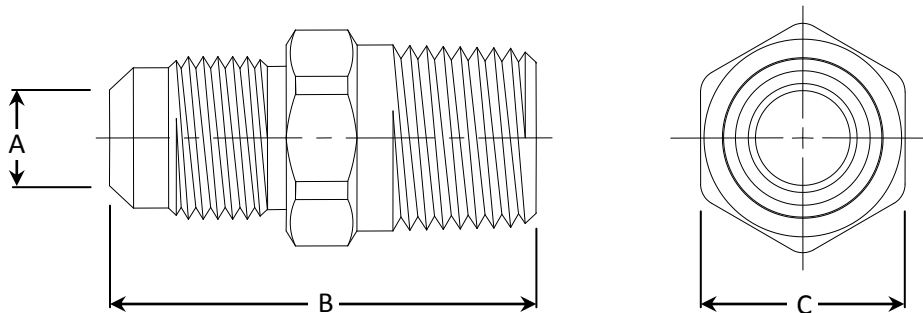

Brass Models



Part Listing:

- AU2-6 3/8" OD Flare x 3/8" M.I.P. (1/8" F.I.P. tapped), brass
- AU2-6 B 3/8" OD Flare x 3/8" M.I.P. (1/8" F.I.P. tapped), brass, bulk packed
- AU2-6S 3/8" OD Flare x 3/8" M.I.P. (1/8" F.I.P. tapped), steel
- AU2-6-8 3/8" OD Flare x 1/2" M.I.P. (3/8" F.I.P. tapped), brass
- AU2-6-8 BT 3/8" OD Flare x 1/2" M.I.P. (3/8" F.I.P. tapped), brass, generic bag
- AU2-6-8S 3/8" OD Flare x 1/2" M.I.P. (3/8" F.I.P. tapped), steel
- AU2-6-8S B 3/8" OD Flare x 1/2" M.I.P. (3/8" F.I.P. tapped), brass, bulk packed
- AU2-8-6 1/2" OD Flare x 3/8" M.I.P., brass
- AU2-8-6S 1/2" OD Flare x 3/8" M.I.P., steel
- AU2-8-6S B 1/2" OD Flare x 3/8" M.I.P., steel, bulk

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.



AU2 Male Gas Adapter - Male Flare x Male Iron Pipe

Part Listing (con't):

<input type="checkbox"/>	AU2-8	1/2" OD Flare x 1/2" M.I.P. (3/8" F.I.P. tapped), brass
<input type="checkbox"/>	AU2-8 B	1/2" OD Flare x 1/2" M.I.P. (3/8" F.I.P. tapped), brass, bulk packed
<input type="checkbox"/>	AU2-8S	1/2" OD Flare x 1/2" M.I.P. (3/8" F.I.P. tapped), steel
<input type="checkbox"/>	AU2-8-12S	1/2" OD Flare x 3/4" M.I.P. (1/2" F.I.P. tapped), steel
<input type="checkbox"/>	AU2-14-12	7/8" OD Flare x 3/4" M.I.P. (1/2" F.I.P. tapped), brass
<input type="checkbox"/>	AU2-14-16	7/8" OD Flare x 1" M.I.P. (3/4" F.I.P. tapped), brass

Listings & Certifications:

- For use with CSA listed ANSI Z21.24 / CSA 6.10 connectors
- For use with CSA listed ANSI Z21.75 / CSA 6.27 connectors



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

BrassCraft®