

**For Residential and Commercial Applications**

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

## B1-\*\*DL/ B2-\*\*DL/ B3-\*\*DL Speedi Plumb® PLUS Braided Toilet Connectors - Compression Inlet

**Use:** For use in potable water distribution systems in accessible locations only.


**Design Features:**

- **Engineered polymer braided** fibers bend freely without kinking or crimping
- **Reinforced PVC inner hose** ensures durability
- **Rubber washers** provide a large pliable sealing surface and ensure a long lasting water-tight connection
- **Long wing nuts** allow for quick connection and ensure dependable thread engagement
- **8-sided pneumatic crimp** provides greater dependability for reliable nut-to-hose connections
- **No Lead**

**Operating Specifications:**

**Temperature:** 40°- 140° F, intermittent to 180° F  
**Pressure:** 125 PSI maximum

**Tubing Diameter:** 0.300" ID (0.550" OD)

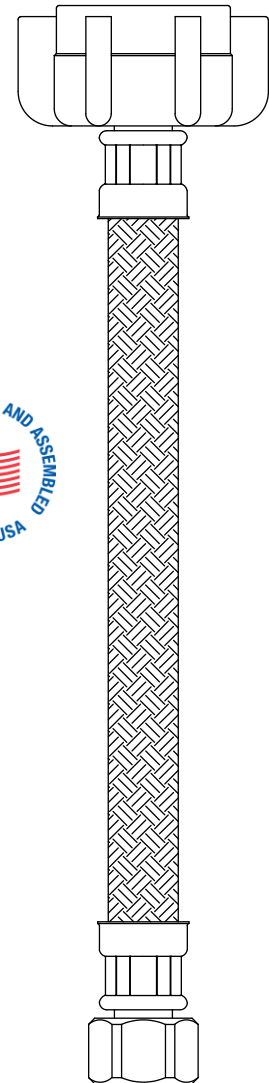

**MATERIAL SPECIFICATIONS**

<b>Inner Hose</b>	Reinforced PVC
<b>Braiding</b>	PVC coated polyester yarn
<b>Barb</b>	Brass
<b>Ferrule</b>	Zinc-plated steel
<b>Nut</b>	Polypropylene
<b>Washer</b>	Rubber
<b>Compression Nut</b>	Brass, chrome plated
<b>FIP Adaptors</b>	Brass, chrome plated

**Part Listing:**

- B1-6DL F \*                    3/8" compression x 7/8" ballcock x 6" length
- B1-9DL F \*\*                    3/8" compression x 7/8" ballcock x 9" length
- B1-12DL F                    3/8" compression x 7/8" ballcock x 12" length
- B1-12DLM F                    3/8" compression x 7/8" ballcock (metal nut) x 12" length
- B1-12DLU D                    Universal Connector - 3/8" compression x 7/8" ballcock x 12" length with 7/16" & 1/2" slip-joint & 1/2" FIP adaptors or 7/16" rubber slip nut

\* No-Lead N/A  
 \*\*No-Lead & DMA N/A

*This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.*




# B1-\*\*DL/ B2-\*\*DL/ B3-\*\*DL Speedi Plumb® PLUS Braided Toilet Connectors - Compression Inlet

**Part Listing (con't):**

- B1-16DL F            3/8" compression x 7/8" ballcock x 16" length
- B1-20DL F            3/8" compression x 7/8" ballcock x 20" length
- B1-20DLM F          3/8" compression x 7/8" ballcock x 20" length
- B1-26DL F            3/8" compression x 7/8" ballcock x 26" length
- B2-12DL F            7/16" compression x 7/8" ballcock x 12" length
- B2-20DL F            7/16" compression x 7/8" ballcock x 20" length
- B3-9DL F \*            1/2" compression x 7/8" ballcock x 9" length
- B3-12DL F            1/2" compression x 7/8" ballcock x 12" length
- B3-12DLM F          1/2" compression x 7/8" ballcock (metal nut) x 12" length
- B3-20DL F            1/2" compression x 7/8" ballcock x 20" length

\* No-Lead N/A

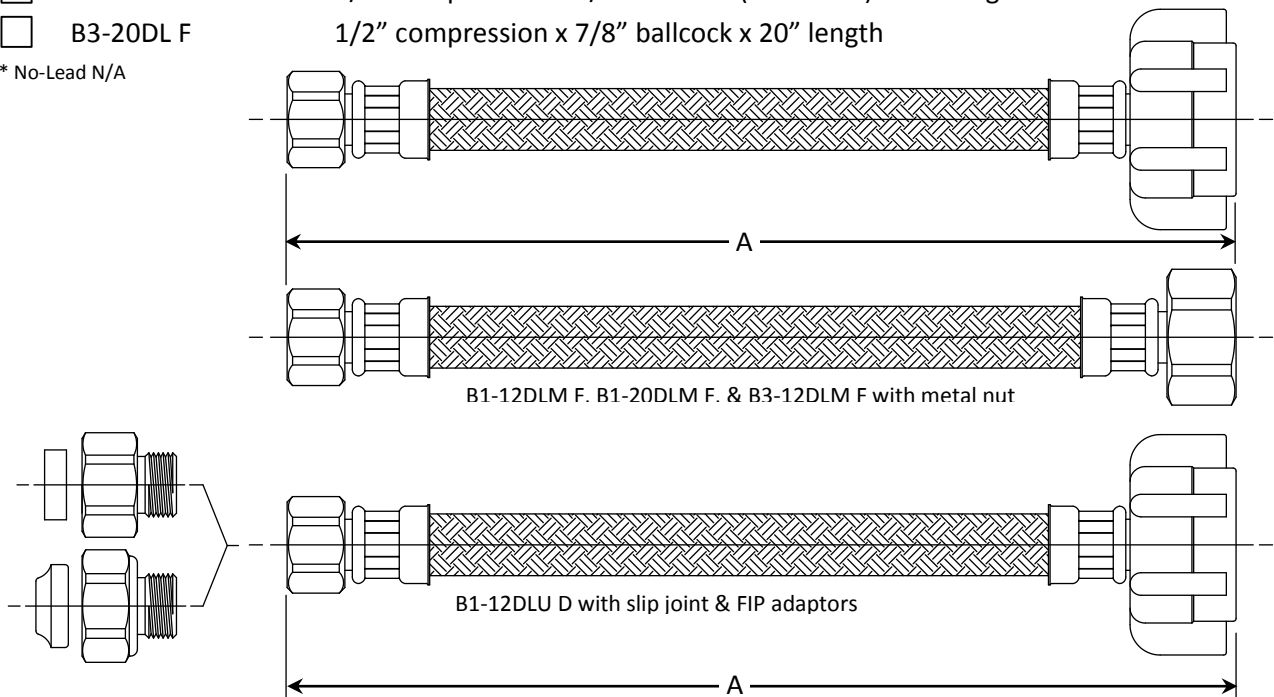

PART DIMENSIONS (Inches)	
Model	DIM. A
B1-6DL	6.0 / 7.0
B1-9DL	9.0 / 10.0
B1-12DL	12.0 / 13.0
B1-12DLM	12.0 / 13.0
B1-12DLU	12.0 / 13.0

PART DIMENSIONS (Inches)	
Model	DIM. A
B1-16DL	16.0 / 17.0
B1-20DL	20.0 / 21.0
B1-20DLM	20.0 / 21.0
B2-12DL	12.0 / 13.0
B2-20DL	20.0 / 21.0

PART DIMENSIONS (Inches)	
Model	DIM. A
B3-9DL	9.0 / 10.0
B3-12DL	12.0 / 13.0
B3-12DLM	12.0 / 13.0
B3-20A	20.0 / 21.0

**Listings & Certifications:**

- IAPMO listed to ASME A112.18.6 and CSA B125.6 (File # 0452)
- CSA listed to ASME A112.18.6 and CSA B125.6 (File #204593)
- No-Lead product CSA listed to Low-Lead Content Certification Program – Plumbing Products Class 6853-01



*This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.*

**BrassCraft®**