For Residential and Commercial Applications

Job Name	Engineer / Architect	
Job Location	Wholesaler	
Submittal Date	Contractor	

B1-**DW Speedi Plumb® PLUS Braided Dishwasher Connector - Compression Inlet

Use: For use in potable water distribution systems in accessible locations only

Design Features:

- Engineered polymer braided fibers bend freely without kinking or crimping
- Reinforced PVC inner hose ensures durability
- Rubber washers provide a large pliable sealing surface and ensure a long lasting water-tight connection
- 8-sided pneumatic crimp provides greater dependability for realible nutto-hose connections



Operating Specifications:

Temperature: 40°-140° F, intermittent to 180° F

Pressure: 125 PSI maximum

Tubing Diameter: 0.300" ID (0.550" OD)

MATERIAL SPECIFICATIONS		
Inner Hose	Reinforced PVC	
Braiding	PVC coated polyester yarn	
Barb	Brass	
Ferrule	Zinc-plated steel	
Washer	Rubber	
Compression Nut	Brass, chrome plated	
Elbow Adaptor	Brass	
Fitting Adaptor	Brass, chrome plated	

Part Listing:

B1-12DW F	3/8" compression x 3/8" compression x 12" length
B1-16DW F	3/8" compression x 3/8" compression x 16" length
B1-20DW F	3/8" compression x 3/8" compression x 20" length
B1-36DW F	3/8" compression x 3/8" compression x 36" length
B1-48DW F	3/8" compression x 3/8" compression x 48" length
B1-48DW6 F	3/8" compression x 3/8" compression x 48" length w/ 3/8" MIP elbow
B1-48DW6 P	3/8" compression x 3/8" compression x 48" length w/ 3/8" MIP elbow, bagged
B1U-48DW612 D	Universal Connector - 3/8" compression x 3/8" compression x 48" length
	w/ 3/8" MIP elbow, 1/2" compression, & 1/2" FIP adaptors, carded

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Co., and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.




B1-**DW Speedi Plumb® PLUS Braided Dishwasher Connectors - Compression Inlet

Part	Listing (con't):	
	B1-48DW1 B	3/8" compression x 48" length w/ 3/4" crimped garden hose elbow, bulk
	B1-48DW1 P	3/8" compression x 48" length w/ 3/4" crimped garden hose elbow, bagged
	B1-48DW12 F	3/8" compression x 3/8" compression x 48" length w/ 3/4" garden hose elbow
	B1-48DW12 P	3/8" compression x 3/8" compression x 48" length w/ 3/4" garden hose elbow, bagged
	B1-60DW F	3/8" compression x 3/8" compression x 60" length
	B1-60DW6 F	3/8" compression x 3/8" compression x 60" length w/ 3/8" MIP elbow
	B1-60DW6 P	3/8" compression x 3/8" compression x 60" length w/ 3/8" MIP elbow, bagged
	B1-60DW1 B	3/8" compression x 60" length w/ 3/4" crimped garden hose elbow, bulk
	B1-60DW1 P	3/8" compression x 60" length w/ 3/4" crimped garden hose elbow, bagged
	B1-60DW12 F	3/8" compression x 3/8" compression x 60" length w/ 3/4" garden hose elbow
	B1-60DW12 P	3/8" compression x 3/8" compression x 60" length w/ 3/4" garden hose elbow, bagged
	B1-72DW F	3/8" compression x 3/8" compression x 72" length
	B1-72DW6 F	3/8" compression x 3/8" compression x 72" length w/ 3/8" MIP elbow
	B1-72DW6 P	3/8" compression x 3/8" compression x 72" length w/ 3/8" MIP elbow, bagged
	B1-72DW1 B	3/8" compression x 72" length w/ 3/4" crimped garden hose elbow, bulk
	B1-72DW1 P	3/8" compression x 72" length w/ 3/4" crimped garden hose elbow, bagged
	B1-72DW12 F	3/8" compression x 3/8" compression x 72" length w/ 3/4" garden hose elbow
	B1-72DW12 P	3/8" compression x 3/8" compression x 72" length w/ 3/4" garden hose elbow, bagged
	B1-72DW612 B	3/8" compression x 3/8" compression x 72" length w/ 3/4" garden hose elbow, bulk
	B1U-72DW612 D	Universal Connector - 3/8" compression x 3/8" compression x 72" length
		w/ 3/8" MIP elbow, 1/2" compression, & 1/2" FIP adaptors, carded
	B1-120DW F	3/8" compression x 3/8" compression x 120" length

© 2016 BrassCraft Mfg. Co.

B1-**DW Speedi Plumb® PLUS Braided Dishwasher Connectors - Compression Inlet

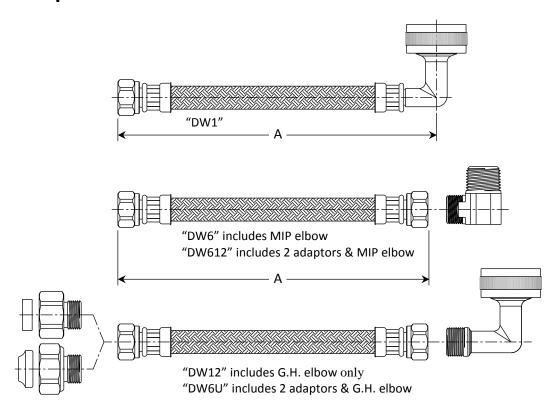

PART DIMENSIONS (Inches)		
Model	DIM. A	
B1-12DW	12.0 / 13.0	
B1-16DW	16.0 / 17.0	
B1-20DW	20.0 / 21.0	
B1-36DW	36.0 / 37.0	

PART DIMENSIONS (Inches)		
Model	DIM. A	
B1-48DW	48.0 / 49.0	
B1-48DW6	48.0 / 49.0	
B1U-48DW6	48.0 / 49.0	
B1-60DW	60.0 / 61.0	

PART DIMENSIONS (Inches)		
Model	DIM. A	
B1-60DW6	60.0 / 61.0	
B1-72DW	72.0 / 73.0	
B1-72DW6	72.0 / 73.0	
B1-120DW	120.0 / 121.0	

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (Including NSF 61 and NSF 372)(File 0645)
- CSA listed to ASME A112.18.1 / CSA B125.1 (Including NSF 61 and NSF 372)(File 204593)
- No-lead product CSA listed to NSF 372 (Class 6853-01)











