

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

B8-**A Speedi Plumb® PLUS Braided Faucet Connectors - Female Iron Pipe Inlet

Use: For use in potable water distribution systems in accessible locations only

Design Features:

- **Engineered polymer braided** fibers bend freely without kinking or crimping
- **Reinforced PVC inner hose** provides added durability under the harshest water conditions
- **Rubber washers** provide a large pliable sealing surface and ensure a long lasting water-tight connection
- **8-sided pneumatic crimp** provides greater dependability for a reliable nut-to-hose connection
- **No Lead**

Operating Specifications:

Temperature: 40°- 140° F, intermittent to 180° F
Pressure: 125 PSI maximum

Tubing Diameter: 0.300" ID (0.550" OD)

MATERIAL SPECIFICATIONS	
Inner Hose	Reinforced PVC
Braiding	PVC coated polyester yarn
Barb	Brass
Ferrule	Steel, zinc plated
Nut	Brass, chrome plated
Washer	Rubber

Part Listing:


- | | | |
|--------------------------|-------------|---|
| <input type="checkbox"/> | B8-12A F | 1/2" FIP* x 1/2" FIP* x 12" length |
| <input type="checkbox"/> | B8-16A F | 1/2" FIP* x 1/2" FIP* x 16" length |
| <input type="checkbox"/> | B8-20A F | 1/2" FIP* x 1/2" FIP* x 20" length |
| <input type="checkbox"/> | B8-24A F | 1/2" FIP* x 1/2" FIP* x 24" length |
| <input type="checkbox"/> | B8-30A F ** | 1/2" FIP* x 1/2" FIP* x 30" length, assembled in Mexico |
| <input type="checkbox"/> | B8-36A F | 1/2" FIP* x 1/2" FIP* x 36" length |
| <input type="checkbox"/> | B8-48A F | 1/2" FIP* x 1/2" FIP* x 48" length |
| <input type="checkbox"/> | B8-72A F | 1/2" FIP* x 1/2" FIP* x 72" length |

*1/2" FIP also fits 7/16" rubber slip nut


This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Co., and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.



**Except where noted

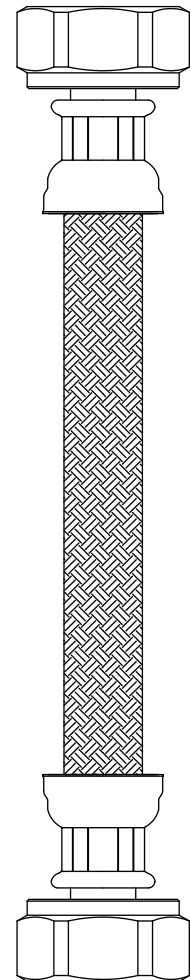

B8-**A Speedi Plumb® PLUS Braided Faucet Connectors - Female Iron Pipe Inlet

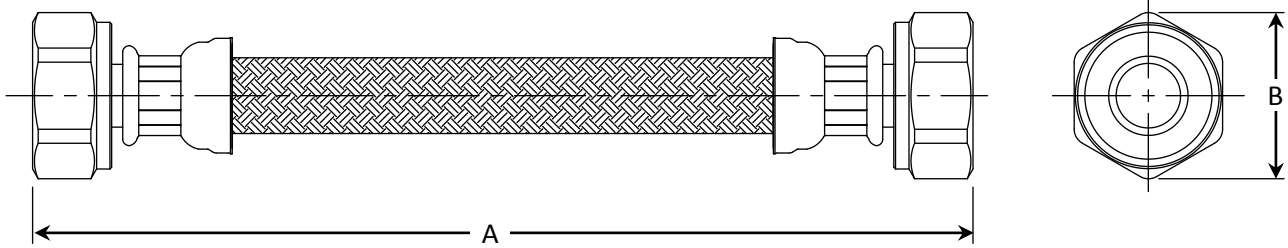

PART DIMENSIONS (Inches)		
Model	DIM. A	DIM. B
B8-12A	12.0 / 13.0	.98
B8-16A	16.0 / 17.0	.98
B8-20A	20.0 / 21.0	.98
B8-24A	24.0 / 25.0	.98
B8-30A	30.0 / 31.0	.98
B8-36A	36.0 / 37.0	.98
B8-48A	48.0 / 49.0	.98
B8-72A	72.0 / 73.0	.98

Listings & Certifications:

- IAPMO listed to ASME A112.18.6 and CSA B125.6 (File # 0452)
- CSA listed to ASME A112.18.6 and CSA B125.6 (File #204593)
- No-lead product CSA listed to NSF 372 (Class 6853-01)



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Co., and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.

400.101 B8 SPP Braided Faucet Connector - FIP Inlet REV 04/16

BrassCraft®

© 2016 BrassCraft Mfg. Co.