

For Residential and Commercial Applications

| | | | |
|----------------|--|----------------------|--|
| Job Name | | Engineer / Architect | |
| Job Location | | Wholesaler | |
| Submittal Date | | Contractor | |

BF1-**DL / BF3-**DL Speedi Plumb® PLUS Braided Toilet Connector - Flare Inlet

Use: For use in potable water distribution systems in accessible locations only.

Design Features:

- **Engineered polymer braided** fibers bend freely without kinking or crimping
- **Reinforced PVC inner hose** ensures durability
- **Rubber washers** provide a large pliable sealing surface and ensure a long lasting water-tight connection
- **Long wing nuts** allow for quick connection and ensure dependable thread engagement
- **8-sided pneumatic crimp** provides greater dependability for reliable nut-to-hose connections
- **No Lead**

Operating Specifications:


Temperature: 40° - 140° F, intermittent to 180° F
Pressure: 125 PSI maximum

Tubing Diameter: 0.300" ID (0.550" OD)

| MATERIAL SPECIFICATIONS | |
|-------------------------|---------------------------|
| Inner Hose | Reinforced PVC |
| Braiding | PVC coated polyester yarn |
| Barb | Brass |
| Ferrule | Zinc-plated steel |
| Nut | Polypropylene |
| Washer | Rubber |
| Compression Nut | Brass, chrome plated |

Part Listing:

- BF1-12DL F 3/8" flare x 7/8" ballcock x 12" length
- BF1-12DLM F 3/8" flare x 7/8" ballcock (metal nut) x 12" length
- BF1-16DL F 3/8" flare x 7/8" ballcock x 16" length
- BF1-20DL F 3/8" flare x 7/8" ballcock x 20" length
- BF3-12DL F 1/2" flare x 7/8" ballcock x 12" length
- BF3-12DLM F 1/2" flare x 7/8" ballcock (metal nut) x 12" length

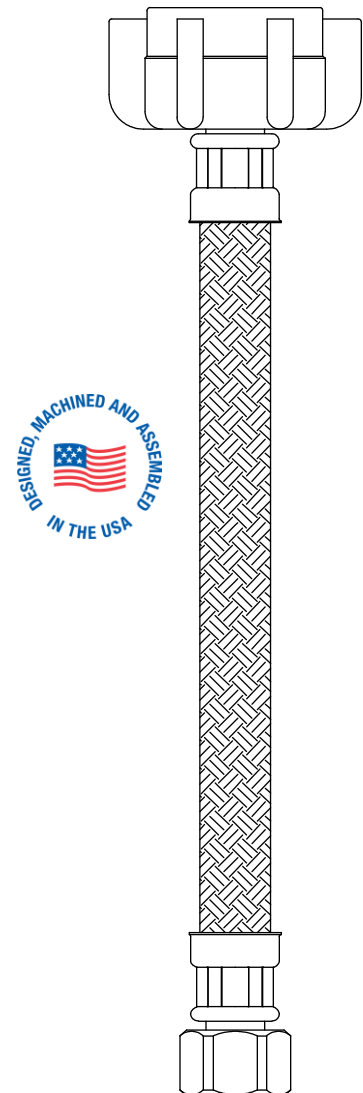


This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.



BF1-**DL / BF3-**DL Speedi Plumb® PLUS Braided Toilet Connector - Flare Inlet

Part Listing (con't):

- BF3-16DL F 1/2" flare x 7/8" ballcock x 16" length
- BF3-20DL F 1/2" flare x 7/8" ballcock x 20" length

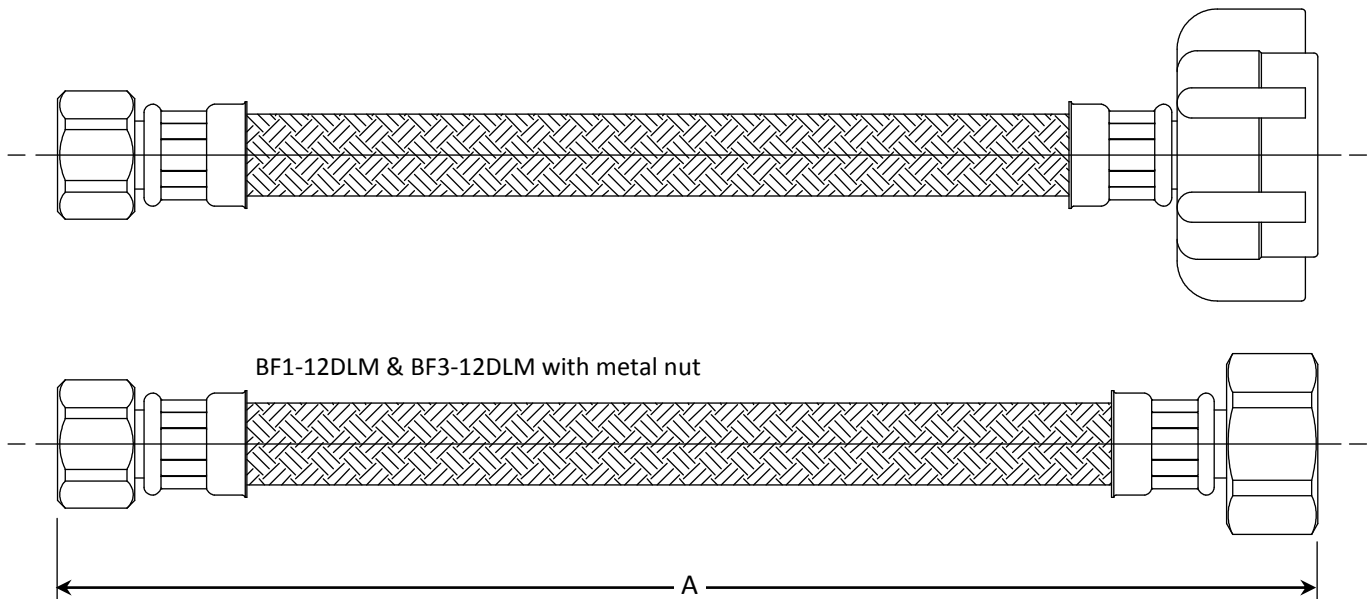

| PART DIMENSIONS (Inches) | |
|---------------------------------|---------------|
| Model | DIM. A |
| BF1-12DL | 12.0 / 13.0 |
| BF1-12DLM | 12.0 / 13.0 |
| BF1-16DL | 16.0 / 17.0 |
| BF1-20DL | 20.0 / 21.0 |

| PART DIMENSIONS (Inches) | |
|---------------------------------|---------------|
| Model | DIM. A |
| BF3-12DL | 12.0 / 13.0 |
| BF3-12DLM | 12.0 / 13.0 |
| BF3-16DL | 16.0 / 17.0 |
| BF3-20DL | 20.0 / 21.0 |

Listings & Certifications:

- IAPMO listed to ASME A112.18.6 and CSA B125.6 (File # 0452)
- CSA listed to ASME A112.18.6 and CSA B125.6 (File #204593)
- No-Lead product CSA listed to Low-Lead Content Certification Program – Plumbing Products Class 6853-01



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.

BrassCraft®