

*For Residential and Commercial Applications*

|                |  |                      |  |
|----------------|--|----------------------|--|
| Job Name       |  | Engineer / Architect |  |
| Job Location   |  | Wholesaler           |  |
| Submittal Date |  | Contractor           |  |

## V1-\*\*DL & V3-\*\*DL Speedi Plumb® Vinyl Toilet Connectors - Compression Inlet

**Use:** For use in potable water distribution systems in accessible locations only

**Design Features:**


- **No kink hose.** The specially engineered reinforced PVC hose provides unique flexibility to prevent kinking and crimping
- **Greater strength and durability** with a tighter weave and two-layer bonded construction, outperforms conventional vinyl connectors
- **Longer wing nuts** ease installation for speedier connections
- **Rubber washers** provide a large pliable sealing surface and ensures a long lasting water tight connection
- **8-sided pneumatic crimp** provides greater dependability for reliable nut-to-hose connections

**Operating Specifications:**

**Temperature:** 40°- 140° F, intermittent to 180° F

**Pressure:** 125 PSI maximum

**Tubing Diameter:** 0.300" I.D. (0.500" O.D.)

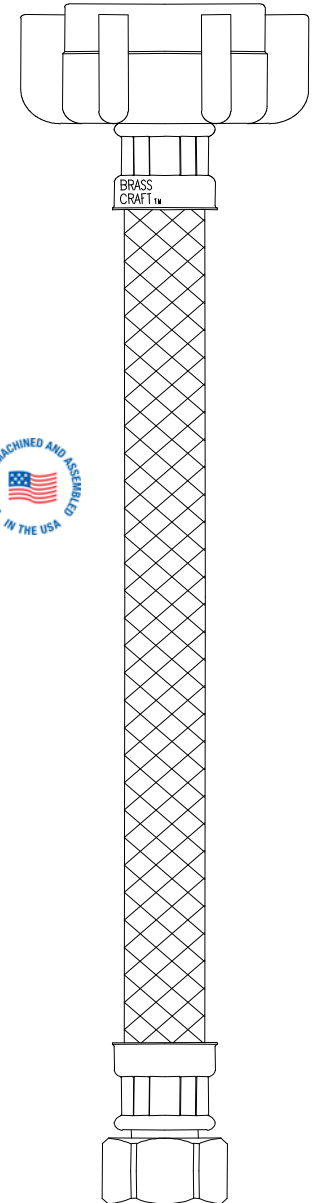

### MATERIAL SPECIFICATIONS

|                                   |   |
|-----------------------------------|---|
| <b>Hose</b>                       | <i>PVC with polyester braid reinforcement</i> |
| <b>Barbs</b>                      | <i>Compliant brass</i>                        |
| <b>Ferrules</b>                   | <i>Zinc plated 1008 steel</i>                 |
| <b>Nuts</b>                       | <i>Polypropylene</i>                          |
| <b>Washers</b>                    | <i>Rrubber</i>                                |
| <b>Compression Ring &amp; Nut</b> | <i>C36000 brass</i>                           |


**Part Listing:**

- |                          |           |   |
|--------------------------|-----------|---|
| <input type="checkbox"/> | V1-9DL F  | 3/8" compression x 7/8" ballcock x 9" length  |
| <input type="checkbox"/> | V1-12DL F | 3/8" compression x 7/8" ballcock x 12" length |
| <input type="checkbox"/> | V1-16DL F | 3/8" compression x 7/8" ballcock x 16" length |
| <input type="checkbox"/> | V1-20DL F | 3/8" compression x 7/8" ballcock x 20" length |
| <input type="checkbox"/> | V3-9DL F  | 1/2" compression x 7/8" ballcock x 9" length  |
| <input type="checkbox"/> | V3-12DL F | 1/2" compression x 7/8" ballcock x 12" length |
| <input type="checkbox"/> | V3-20DL F | 1/2" compression x 7/8" ballcock x 20" length |

*This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.*



# V1-\*\*DL & V3-\*\*DL Speedi Plumb® Vinyl Toilet Connectors - Compression Inlet

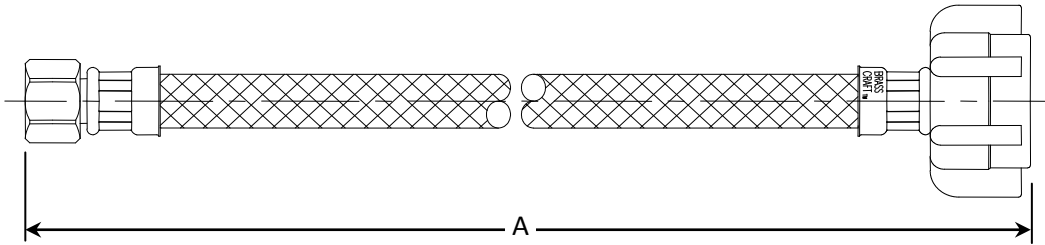

| PART DIMENSIONS (Inches) |             |
|--------------------------|-------------|
| Model                    | DIM. A      |
| V1-9DL                   | 9.0 / 10.0  |
| V1-12DL                  | 12.0 / 13.0 |
| V1-16DL                  | 16.0 / 17.0 |

| PART DIMENSIONS (Inches) |             |
|--------------------------|-------------|
| Model                    | DIM. A      |
| V1-20DL                  | 20.0 / 21.0 |
| V3-9DL                   | 9.0 / 10.0  |
| V3-12DL                  | 12.0 / 13.0 |

| PART DIMENSIONS (Inches) |             |
|--------------------------|-------------|
| Model                    | DIM. A      |
| V3-20DL                  | 20.0 / 21.0 |

### Listings & Certifications:

- IAPMO listed to ASME A112.18.6-2003 (File # 0452)
- CSA listed to ASME A112.18.6-2003 / CSA B125 (File # 204593)



*This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.*

**BrassCraft®**