


# DiversiTech Corporation



## Clear Vinyl Tubing


- Seven Sizes from 3/16" to 1" Diameters
- Non-Toxic Clear Vinyl Chloride (PVC)
- Resists Crimping and Kinking with a Durometer Value of 86 (Shore A)
- Service Temperature 140° F (60° C)

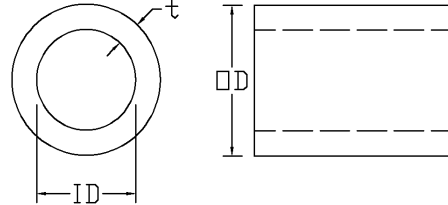

DT P/N	Weight (lbs)	Length (ft)	ID (in)	OD (in)	Wall Thickness (in)
7-316	1.46	100	0.188	0.264	0.038
7-14	2.15	100	0.250	0.336	0.043
7-38	3.59	100	0.371	0.471	0.050
7-12	5.84	100	0.485	0.610	0.063
7-58	8.43	100	0.598	0.745	0.074
7-34	13.06	100	0.705	0.896	0.096
7-78	9.29	50	0.800	1.037	0.119
7-10	12.44	50	0.923	1.198	0.137

## Premium Clear Vinyl Tubing

- Seven Sizes from 1/4" to 1" Diameters
- Non-Toxic Clear Vinyl Chloride (PVC)
- Resists Crimping and Kinking with a thicker wall and Durometer Value of 80 (Shore A)
- Service Temperature 140° F (60° C)

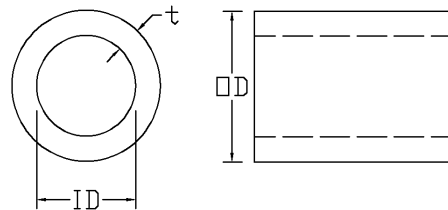

DT P/N	Weight (lbs)	Length (ft)	ID (in)	OD (in)	Wall Thickness (in)
7-14P	2.80	100	0.250	0.360	0.055
7-38P	4.58	100	0.368	0.495	0.064
7-12P	6.99	100	0.482	0.632	0.075
7-58P	10.38	100	0.588	0.771	0.092
7-34P	14.50	100	0.699	0.914	0.108
7-78P	9.95	50	0.793	1.051	0.129
7-10P	13.38	50	0.915	1.216	0.150