

# DURABASE® Fiberglass Shower Floors

## Square and Rectangular



Meet the quality standard in shower floors...  
**DURABASE®... exclusively from  
E.L. Mustee & Sons, Inc.**

For decades, homeowners and builders have made DURABASE® fiberglass shower floors their choice because of great design features, quality construction and installation ease.



Available in all popular square and rectangular sizes, DURABASE® shower floors can be used with Mustee DURAWALL® shower wall system, tile or other wall treatment to create a beautiful shower space that will complement any décor.



### Features:

- High-strength, one-piece, compression-molded fiberglass construction.
- Structural design creates strength, rigidity and a long service life.
- Molded drain with seal and removable strainer for 2" (Sch. 40) ABS, PVC or iron DWV sanitary pipe.
- Mold/mildew/stain-resistant semi-gloss surface finish.
- Slip-resistant Starburst® floor finish.
- Fits Mustee shower wall systems, tile and other wall treatments.
- STYLEMATE® enclosures are available to create a glamorous finishing touch.

**Code Accepted:** DURABASE® Shower Floors meet or exceed performance requirements:

- American National Standards Institute (ANSI)—Specification Z 124.1.2
- IAPMO® Listed 
- Warnock Hersey® Listed—CSA test standards: Shower Floor—#B45.0 and #B45.5 
- American Society of Testing and Material (ASTM)—D 635, E 84 and E 162

### Optional Drain Seals and Drain — Ordered separately

Part No.	Description
32.404	Drain Seal for 2" copper pipe
32.405	Drain Seal for 1½" ABS/PVC pipe
60.300A	Drain Kit—White, Fits 3060L & 3060R
60.300ABN	Drain Kit—Bone, Fits 3060L & 3060R
42.317A	Drain—PVC with seal for 2" iron, PVC or ABS pipe


## Specifications

### SQUARE—single threshold


Nom. Size	Model	Color	A	B	C	D
32" x 32"	3232M	White, Bone	32"	32"	16"	16"
34" x 34"	3434M	White	34"	34"	17"	17"
36" x 36"	3636M	White, Bone, Biscuit	36"	36"	18"	18"
42" x 42"	4242M	White, Bone	42"	42"	21"	21"

### RECTANGULAR—single threshold

Nom. Size	Model	Color	A	B	C	D
30" x 60"	3060L*	White	60"	30"	15"	30"
30" x 60"	3060R*	White	60"	30"	15"	30"
32" x 48"	3248M	White, Bone, Biscuit	48"	32"	16"	24"
32" x 54"	3254M	White	54"	32"	16"	27"
32" x 60"	3260M	White	60"	32"	16"	30"
34" x 42"	3442M	White, Bone, Biscuit	42"	34"	17"	21"
34" x 48"	3448M	White, Bone, Biscuit	48"	34"	17"	24"
34" x 54"	3454M	White, Bone	54"	34"	17"	27"
34" x 60"	3460M	White, Bone, Biscuit	60"	34"	17"	30"
42" x 36"	4236M+	White	36"	42"	21"	18"

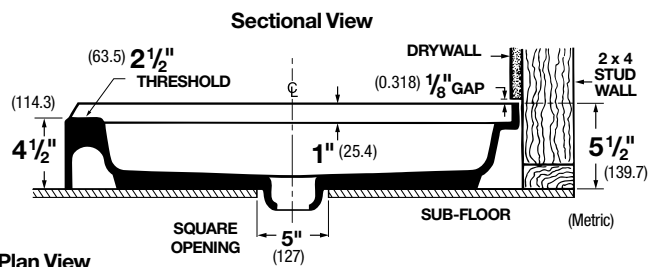

### Plan View



\*3060L & 3060R require a drain.

+Threshold is on the 36" side.

Color suffix: M for White, BN for Bone and BT for Biscuit (e.g. 3636CM, 3838CBN, 4242BT).

**General:** Furnish and install as shown on plans, DURABASE® Shower Floor model \_\_\_\_\_, as manufactured by E.L. Mustee & Sons, Inc. Floor to be one-piece, molded fiberglass, made with matched metal molds. Surface to be slip-resistant Starburst® design that does not interfere with the flow of water. Size \_\_\_\_\_" x \_\_\_\_\_". Shoulder will be no less than 3" high or less than 1" wide. Tiling flange will extend not less than 1" higher than the threshold which provides an integral molded water barrier. Threshold will be not less than 4½" high. Molded-in drain and drain seal for installation of 2" iron DWV (Sch. 40) PVC or ABS sanitary drain pipe. Removable strainer. Shall meet ANSI Specification Z 124.1.2. Color \_\_\_\_\_ (White, Bone, Biscuit).

# DURABASE® Fiberglass Shower Floors

## NEO-ANGLE and Corner



Say goodbye to the drab corner of your bathroom and let Mustee's DURABASE® NEO-ANGLE or Corner shower floors help easily transform it into a dramatic, luxury shower space.



For decades, homeowners and builders have made DURABASE® fiberglass shower floors their choice because of excellent design features, quality construction and installation ease.

Available in all popular NEO-ANGLE and Corner sizes, DURABASE® shower floors can be used with several Mustee DURAWALL® shower wall system, tile or other wall treatment to create a beautiful shower space that will complement any décor.

### Features:

- High-strength, one-piece, compression-molded fiberglass construction.
- Structural design creates a strong, rigid floor surface.
- Molded drain with seal and removable strainer for 2" (Sch. 40) ABS, PVC or iron DWV sanitary pipe.
- Mold/mildew/stain-resistant semi-gloss surface finish.
- Slip-resistant Starburst® floor finish.
- Fits Mustee shower wall systems, tile and other wall treatments.
- Stylemate® enclosures are available to create a glamorous finishing touch.

**Code Accepted:** DURABASE® Shower Floors meet or exceed performance requirements:

- American National Standards Institute (ANSI)—Specification Z 124.1.2
- IAPMO® Listed 
- Warnock Hersey® Listed—CSA test standards: Shower Floor—#B45.0 and #B45.5 
- American Society of Testing and Material (ASTM)—D 635, E 84 and E 162

## Specifications

### Optional Drain Seals — Ordered separately

Part No.	Description
32.404	Drain Seal for 2" copper pipe
32.405	Drain Seal for 1½" ABS/PVC pipe

### NEO-ANGLE—corner threshold



Nom. Size	Model	Color	A	B	C	Center Lines*
36" x 36"	3636CM	White, Bone, Biscuit	36"	12"	18"	17½" x 24⅜" x 17½"
38" x 38"	3838CM	White, Bone, Biscuit	38"	12"	20"	19½" x 24⅜" x 19½"
42" x 42"	4242CM	White, Bone	42"	12"	24"	23½" x 24⅜" x 23½"

### CORNER—double threshold

34" x 34"	3434DTM	White	34"	17"	—	—
36" x 36"	3636DTM	White	36"	18"	—	—

\*Center line varies based upon thickness of side walls.

Color suffix: M for White, BN for Bone and BT for Biscuit (e.g. 3636CM, 3838CBN, 4242BT).

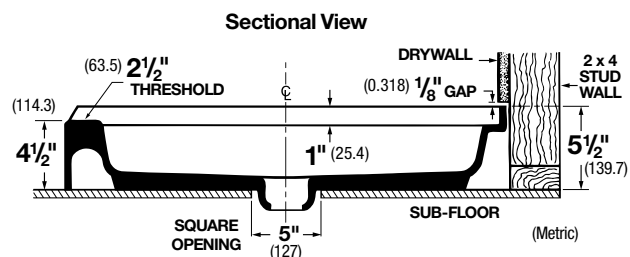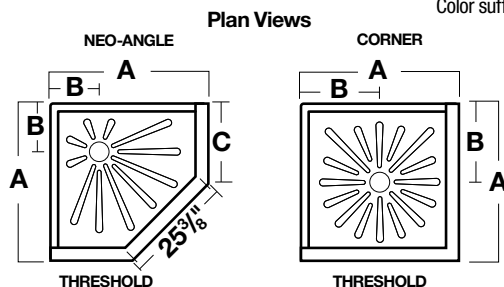

**General:** Furnish and install as shown on plans, DURABASE® Shower Floor model \_\_\_\_\_, as manufactured by E.L. Mustee & Sons, Inc. Floor to be one-piece, molded fiberglass, made with matched metal molds. Surface to be slip-resistant Starburst® design that does not interfere with the flow of water. Size \_\_\_\_\_" x \_\_\_\_\_. Shoulder will be no less than 3" high or less than 1" wide. Tiling flange will extend not less than 1" higher than the threshold which provides an integral molded water barrier. Threshold will be not less than 4½" high. Molded-in drain and drain seal for installation of 2" iron DWV (Sch. 40) PVC or ABS sanitary drain pipe. Removable strainer. Shall meet ANSI Specification Z 124.1.2. Color \_\_\_\_\_ (White, Bone, Biscuit).

To reorder, specify ADV-359

Notice: Our continuous commitment to product improvement may result in changes to product specifications without notice. Patented and patents pending. ADI/12-09/NM. Made and Printed in U.S.A.