

WATER-FLEX® Stainless Steel Water Heater Connector



TECHNICAL DATA

DESCRIPTION: WATER-FLEX® Stainless Steel Corrugated Water Heater Connectors
 - 3/4" FIP x 3/4" FIP
 - Working pressure up to 125 psig
 - Intermittent impulse pressure: Up to 180 psig
 - Temperature: -40°F to 180°F (-40°C to 82°C)

CONSTRUCTION: Corrugated Stainless Steel
 - Nickel Plated Brass Nut
 - Rubber Washer

FINISH: Stainless Steel


CODE APPROVALS:
 UPC, Complies with Low-Lead Plumbing Law



Country of Origin: China

PART#	DESCRIPTION	FINISH
0437012	12"	Stainless Steel
0437015	15"	Stainless Steel
0437018	18"	Stainless Steel
0437024	24"	Stainless Steel

ROUGH IN DRAWING

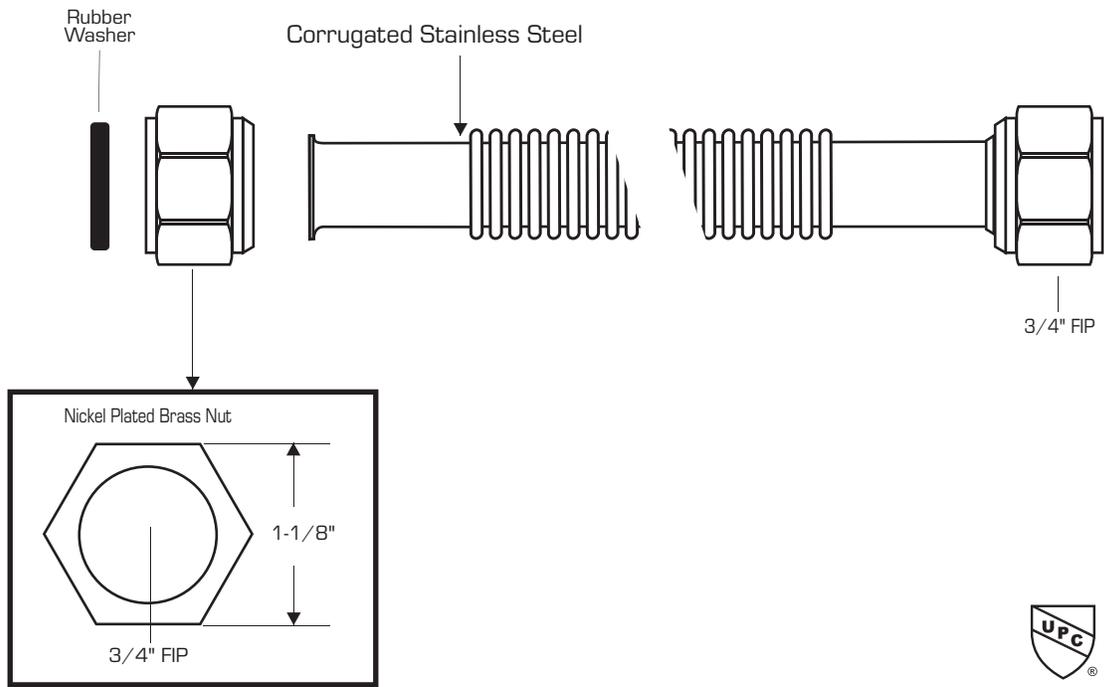

ALL DIMENSIONS SHOWN ARE NOMINAL