


ALUMINUM TWO-WAY CONNECTORS

Range-taking mechanical set-screw in-line splices
 High strength aluminum alloy 6061-T6
 Tin-plated for low contact resistance
 Positive center stop



Dual-Rated
 CU9AL
 90°C 600V

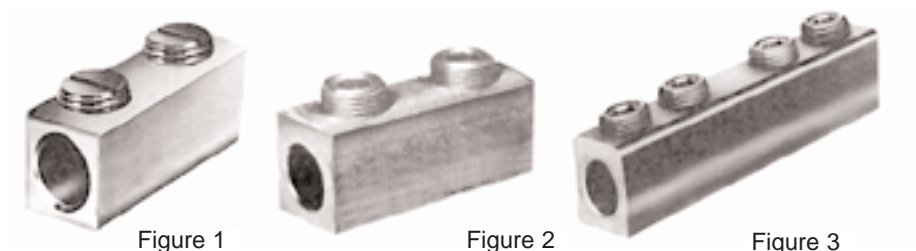

ABS SERIES

Splices

NAED NUMBER	CATALOG NUMBER	WIRE RANGE		SCREWS		OVERALL LENGTH	FIG.	CTN QTY	EST. SHIPPING	
		MAX.	MIN.	NO.	TYPE				WEIGHT (lbs)	UNIT
12501	ABS 2	#2	#14	2	SLOT	1 3/8	1	25	0.98	CTN
12502	ABS 10	1/0	#14	2	SLOT	2	1	25	1.38	CTN
12503	ABS 40	4/0	#6	2	5/16 HEX	2	2	25	3.34	CTN
12504	ABS 250	250	#6	4	5/16 HEX	4	3	12	2.92	CTN
12506	ABS 350	350	#6	4	3/8 HEX	4 1/4	3	12	4.60	CTN
12507	ABS 500	500	3/0	4	3/8 HEX	5	3	6	2.86	CTN
12508	ABS 750	750	250	4	3/8 HEX	6 1/4	3	3	2.74	CTN

BEAVER-TOOTH LUGS

Aluminum Lay-in Ground Lugs

High strength aluminum alloy 6061-T6
 Tin-plated for low contact resistance



Dual-Rated
 CU9AL
 90°C 600V



BTL SERIES

Lay-in Lugs

NAED NUMBER	CATALOG NUMBER	WIRE RANGE		BOLT SIZE	DIMENSIONS			CTN QTY	EST. SHIPPING	
		MAX.	MIN.		LENGTH	WIDTH	HEIGHT		WEIGHT (lbs)	UNIT
13800	† BTL 4	#4	#14	3/16	1 1/16	3/8	3/4	100	1.15	CTN
13805	BTL 0	1/0	#8	1/4	1 1/2	9/16	1 1/8	50	3.31	CTN
13810	*BTL 000	3/0	#6	5/16	2	13/16	1 1/2	50	8.27	CTN
13815	*BTL 250	250	#6	5/16	2 3/16	13/16	1 11/16	25	2.25	CTN

*Sizes 3/0 and larger have hex socket screws.
 † For direct burial applications use Cat. No. BTL4-DB.

