


## Vinyl Insulated Spade Terminal Dimensions



Wire Range (AWG)	Wire Range (mm <sup>2</sup> )	Stud Size (in.)	Stud Size (mm)	Max. Wire Ins. Dia. (in.)	Max Wire Ins. Dia. (mm)	Dimensions (in.)				Dimensions (mm)				Cat. No.
						L	W	E	F	L	W	E	F	
22-18	0.5 - 1.0	6	3.7	.157	4.0	.827	.252	.394	.256	21.0	6.4	10.0	6.5	<b>83-7111</b> <b>84-7111</b>
		8	4.3			.827	.283	.394	.256	21.0	7.2	10.0	6.5	<b>83-7121</b>
		10	5.3			.827	.374	.394	.256	21.0	9.5	10.0	6.5	<b>83-7131</b>
16-14	1.5 - 2.5	6	3.7	.177	4.5	.827	.236	.394	.256	21.0	6.0	10.0	6.5	<b>83-7151</b>
		8	4.3			.827	.283	.394	.256	21.0	7.2	10.0	6.5	<b>83-7161</b> <b>84-7161</b>
		10	5.3			.827	.366	.394	.256	21.0	9.3	10.0	6.5	<b>83-7171</b> <b>84-7171</b>
12-10	4.0 - 6.0	6	3.7	.248	6.3	1.004	.327	.512	.276	25.5	8.3	13.0	7.0	<b>83-7201</b>
		8	4.3			1.004	.283	.512	.357	25.5	9.0	13.0	7.0	<b>83-7211</b>
		10	5.3			1.004	.283	.512	.354	25.5	9.0	13.0	7.0	<b>83-7221</b> <b>84-7221</b>
		1/4	6.4			1.240	.472	.512	.472	31.5	12.0	13.0	12.0	<b>83-7231</b>

75°C/600 Volts max.

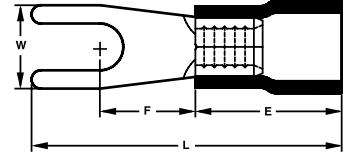