




# THREADED DROP PIPE

MEETS ASTM D1784 CELL CLASS 12454 AND ASTM D1785.

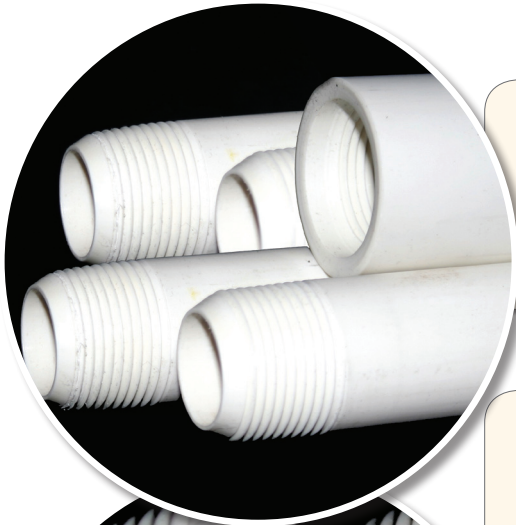

## APPLICATIONS

JM Eagle's Threaded Drop Pipe is suitable for any domestic, municipal, industrial and dewatering application where solvent-weld PVC well casing is used.



## DESCRIPTION

JM Eagle Threaded Drop Pipe is made from PVC compound meeting cell class 12454 per ASTM D 1784. The pipe conforms to specifications set forth by ASTM D 1785. Drop pipe is manufactured in 20-foot overall lengths. The 1-inch and 1 ¼-inch diameter pipes come with thread protects on each end.

JM Eagle Threaded Drop Pipe is listed to ANSI/NSF Standard 61 for potability.

JM Eagle Threaded Drop Pipe in both Schedule 80 and 120 in 1-, 1 ¼-inch, 1 ½-inch and 2-inch diameters.



## BENEFITS

**JM Eagle's Threaded Drop Pipe stands up to the rigors of heavy handling, yet is less than one-seventh the weight of steel pipe.**

- Totally corrosion-free, it is a highly dependable environmentally friendly product that is easier to handle and less expensive to ship than comparable steel drop pipe.
- It is economical and easy to install, and its smooth walls improve the flow of water by reducing friction loss.
- JM Eagle's 1- and 1 ¼-inch threaded couplings for this pipe are machined under the strictest standards using heavy-wall coupling stock to ensure increased strength and reliability.



# THREADED DROP PIPE

## SUBMITTAL AND DATA SHEET

CLASS: Schedule 80 Threaded Drop Pipe

| NONIMAL PIPE SIZE (IN) | AVERAGE O.D. (IN) | APPROX. I.D. (IN) | MIN. T. (IN) | PRESSURE RATING (psi) | APPROX. WEIGHT (LBS/100 FT) |
|------------------------|-------------------|-------------------|--------------|-----------------------|-----------------------------|
| 1                      | 1.315             | 0.93              | 0.179        | 320                   | 42                          |
| 1¼                     | 1.660             | 1.25              | 0.191        | 260                   | 58                          |
| 1½                     | 1.900             | 1.47              | 0.200        | 240                   | 70                          |
| 2                      | 2.375             | 1.91              | 0.218        | 200                   | 97                          |

CLASS: Schedule 120 Deep Drop Threaded Drop Pipe

| NONIMAL PIPE SIZE (IN) | AVERAGE O.D. (IN) | APPROX. I.D. (IN) | MIN. T. (IN) | PRESSURE RATING (psi) | APPROX. WEIGHT (LBS/100 FT) |
|------------------------|-------------------|-------------------|--------------|-----------------------|-----------------------------|
| 1                      | 1.315             | 0.85              | 0.200        | 360                   | 48                          |
| 1¼                     | 1.660             | 1.16              | 0.215        | 300                   | 68                          |
| 1½                     | 1.900             | 1.39              | 0.225        | 270                   | 82                          |
| 2                      | 2.375             | 1.81              | 0.250        | 240                   | 115                         |

I.D. : Inside Diameter

O.D. : Outside Diameter

T. : Wall Thickness

Pipes come with thread protector on each end.