

DRYCONN®
WATERPROOF CONNECTORS

King 6 Connectors

- UL 486D Listed and 600V Rated
- Temperature Rating: 105 °C (221 °F)
- Silicone Sealant: -45 °F to 400 °F
- Rated for underground, direct bury wire splices up to 600V
- Designed for tracer splices and cathodic applications

King 6 Yellow
Min #22/Max #8



King 6 Blue
Min #22/Max #8

SKU# 10666 King 6 Blue- Bag of 10
SKU# 31556 King 6 Yellow- Bag of 10


MADE IN USA

U.S. Pat. 5,771,578 and additional Patents Pending apply. All other trademarks, U.S. and Foreign Patents apply. All Rights Reserved.

DRYCONN®
WATERPROOF CONNECTORS

DB Lugs
Direct Bury

- Waterproof and corrosion proof
- Pre-filled with dielectric silicone sealant that never hardens
- Install service line without cutting the main line
- Installs in one minute or less
- Manufacturer approved for direct bury
- Silicone Sealant Temperature Rating: -45 °F to 400 °F
- Designed for low voltage tracer splices and cathodic applications up to 50V

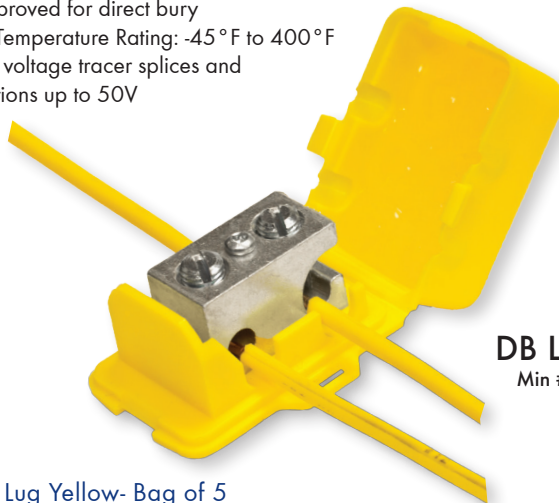

DB Lug Yellow
Min #14/Max #10



DB Lug Aqua
Min #14/Max #10

SKU# 90120 DB Lug Yellow- Bag of 5
SKU# 90220 DB Lug Aqua- Bag of 5

MADE IN USA

U.S. Pat. 7,044,776, 7,677,932, 7,223,132, 7,507,126 7,988,503 and additional Patents Pending apply. All other trademarks, U.S. and Foreign Patents apply. All Rights Reserved.