

8

200 AMP
SINGLE
POSITION
SOCKETS

Single Position Sockets

200 Amps | 4 Terminals | Ringless




U7021-RL-TG




U7040-RL-TG




U1980-O

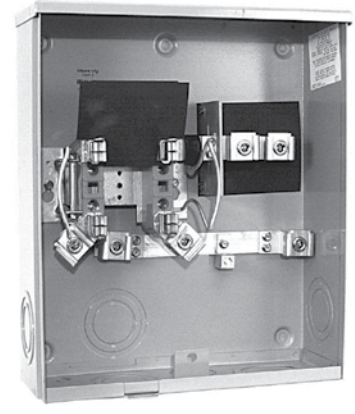


U4413-O




7021



7040



1980



4413

200 Amps | 4 Terminals | Ringless | Single Position

Catalog Number	Terminals	Service	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts			
				Line	Load		D"	W"	H"	1	2	3	4
U7021-RL-TG	4	OH	H.O.	#6-350	#6-350	None	4½	8	15½	2½	¼, ½	¼	—
U7021-DL-TG	4	OH	2"	#6-350	#6-350	None	4½	8	15½	2½	¼, ½	¼	—
U7040-RL-TG	4	OH	H.O.	#6-350	#6-350	None	4½	11	15½	2½	¼, ½	¼	—
U1980-O	4	UG	Blank	#6-350	#6-350	None	4½	13	15¼	3	2½	1½	¼, ½
U4413-O	4	UG	Blank	#6-350	#6-350	None	4½	13	15¼	3	2½	1½	¼, ½

Notes

- **Hubs:** For proper hub selection, see the hub suffix chart on the accessories page.
- **Fifth Terminal:** For field-installed fifth terminal, order catalog number **K5T**.
- **Connectors:** Extruded aluminum connectors are tin plated.
- **U4413-O:** This unit is a right-side wireway design.



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.