


Lever Bypass Single Position

320 Amp | 5 Terminals | Ringless

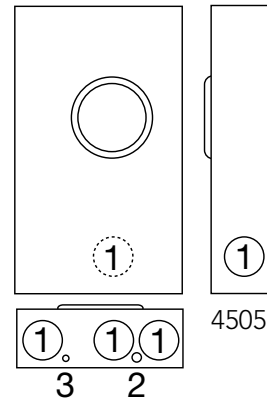

U4505-X

320 Amps | 5 Terminals | Ringless | Lever Bypass | Single Position

Catalog Number	Terminals	Service	Hub	Connectors CU/AL		Bypass	Dimensions			Knockouts		
				Line	Load		D"	W"	H"	1	2	3
U4505-X	5	OH	C.P.	3/8" x 16 Studs	3/8" x 16 Studs	Lever	4 7/8	15	28 1/4	3	1/4, 1/2	1/4

Notes

- **Hubs:** For proper hub selection, see the hub suffix chart on the accessories page.
- **Lever Bypass:** The lever supplies clamping action and operates bypass device.
- **Isolated Neutral:** For field-installed isolated neutral, order **K5979**.
- **Connectors:** Studded products are supplied with 3/8"-16 hex head nuts with Belleville washers. For connector lug kits, order as extra from chart in accessories section. Separate lug kits are required for line and load.



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.