


# CAPACITORS

## DUAL ROUND CAPACITORS



### PROTECH/OEM Dual Round Capacitors

- Certified to the highest level of UL 810; tested and approved for 5,000 AFC
- Exact OEM fit for Rheem, Ruud, and WeatherKing equipment when selected from unit parts lists

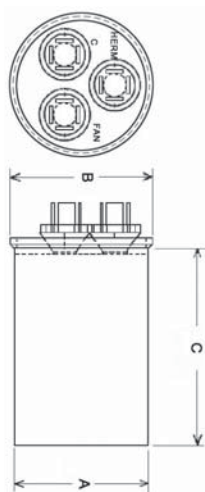

PART NO	CAPACITANCE (1) (uF)	CAPACITANCE (2) (uF)	VOLTAGE (VAC)	DIMENSIONS A (IN)	DIMENSIONS B (IN)	DIMENSIONS C (IN)
43-25133-18	20	3.0	370	2.0	2.120	2.880 (max.)
43-25133-01	25	3.0	370	2.0	2.120	3.640 (max.)
43-25133-19	25	5.0	370	2.0	2.120	3.156 (max.)
43-25133-02	30	3.0	370	20.0	2.120	4.130 (max.)
43-25133-20	30	3.0	440	2.5	2.620	4.200 (max.)
43-25133-21	30	5.0	370	2.0	2.120	3.350 (max.)
43-25133-36	30	5.0	440	2.0	2.120	3.940 (max.)
43-25133-41	30	7.5	370	2.0	2.120	4.330 (max.)
43-101665-56	30	7.5	370	2.0	2.100	3.185
43-25133-03	35	3.0	370	2.0	2.120	4.130 (max.)
43-25133-11	35	3.0	440	2.5	2.620	3.640 (max.)
43-25133-35	35	5.0	370	2.0	2.120	3.875 (max.)
43-25133-12	35	5.0	440	2.5	2.620	4.750 (max.)
43-101665-06	35	5.0	440	2.0	2.125	4.330
43-25133-40	35	7.5	440	2.0	2.120	4.330 (max.)
43-26271-50	35	10.0	370	2.0	2.125	3.750
43-25133-04	40	3.0	370	2.0	2.120	4.000 (max.)
43-25133-13	40	3.0	440	2.5	2.620	3.750 (max.)
43-26261-09	40	5.0	370	2.0	2.160	4.630
43-25133-22	40	5.0	370	2.5	2.620	3.640 (max.)
43-25133-14	40	50.0	440	2.5	2.620	3.640 (max.)
43-26271-51	40	7.5	370	2.0	2.125	3.750
43-26261-46	40	10.0	370	2.0	2.160	4.630
43-26271-46	40	10.0	370	2.0	2.125	3.750
43-25133-23	40	10.0	440	2.5	2.620	3.750 (max.)
43-26261-11	45	3.0	370	2.0	2.160	5.120
43-25133-05	45	3.0	370	2.5	2.620	3.640 (max.)
43-101665-11	45	3.0	370	2.0	2.125	4.920
43-26271-51	40	7.5	370	2.0	2.125	3.750
43-101665-61	40	7.5	440	2.5	2.625	4.750
43-26271-46	40	10.0	370	2.0	2.125	3.750
43-25133-23	40	10.0	440	2.5	2.620	3.750 (max.)
43-101665-34	45	3.0	370	2.5	2.600	3.350
43-25133-05	45	3.0	370	2.5	2.620	3.640 (max.)
43-101665-11	45	3.0	370	2.0	2.125	4.920
43-25133-15	45	3.0	440	2.5	2.620	4.250 (max.)
43-25133-06	45	5.0	370	2.0	2.120	3.875 (max.)
43-25133-16	45	5.0	440	2.5	2.620	4.250 (max.)
43-101665-52	45	7.5	370	2.0	2.100	3.940
43-101665-62	45	7.5	440	2.5	2.625	4.750
43-26271-48	45	10.0	370	2.0	2.125	3.750
43-25133-24	45	10.0	440	2.5	2.620	4.330 (max.)
43-25133-07	50	3.0	370	2.5	2.620	3.350 (max.)
43-25133-25	50	5.0	370	2.5	2.620	3.640 (max.)
43-25133-26	50	5.0	440	2.5	2.620	3.940 (max.)
43-25133-38	50	7.5	370	2.5	2.620	4.920 (max.)
43-25133-27	50	10.0	370	2.5	2.620	3.940 (max.)


(continued on next page)

**CAPACITORS**

**DUAL ROUND CAPACITORS**



**PROTECH/OEM Dual Round Capacitors – CONTINUED**

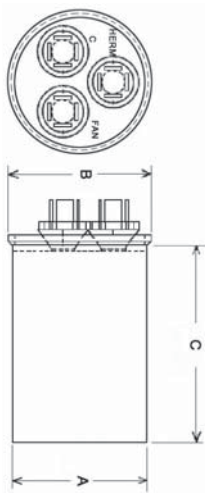

PART NO	CAPACITANCE (1) (uF)	CAPACITANCE (2) (uF)	VOLTAGE (VAC)	DIMENSIONS A (IN)	DIMENSIONS B (IN)	DIMENSIONS C (IN)
43-25133-28	55	3.0	370	2.5	2.620	4.000 (max.)
43-25133-08	55	5.0	370	2.5	2.620	3.480 (max.)
43-25133-17	55	5.0	440	2.5	2.650	4.200 (max.)
43-25133-39	55	7.5	370	2.5	2.620	3.940 (max.)
43-25133-29	55	10.0	370	2.5	2.620	3.750 (max.)
43-25133-09	60	3.0	370	2.5	2.620	3.750 (max.)
43-25133-10	60	5.0	370	2.5	2.620	3.750 (max.)
43-25133-30	60	5.0	440	2.5	2.620	4.750 (max.)
43-25133-31	60	10.0	370	2.5	2.620	3.750 (max.)
43-25133-37	60	10.0	440	2.5	2.620	3.940 (max.)
43-26271-49	70	3.0	370	2.5	2.625	3.750
43-25133-32	70	5.0	370	2.5	2.620	4.130 (max.)
43-101665-59	70	5.0	440	2.5	2.600	4.810
43-101665-53	70	7.5	370	2.5	2.625	3.940
43-26271-47	70	10.0	370	2.5	2.620	3.750
43-101665-58	70	10.0	440	2.5	2.600	4.810
43-25133-33	80	5.0	370	2.5	2.620	4.350 (max.)
43-25133-34	80	10.0	370	2.5	2.620	3.940 (max.)

**Wholesale Dual Round Capacitors**

- Certified to the highest level of UL 810; tested and approved for 5,000 AFC
- Can size may vary to allow competitive sourcing – allowing us to bring you the best capacitor at the best possible price!

PART NO	CAPACITANCE (1) (uF)	CAPACITANCE (2) (uF)	VOLTAGE (VAC)
43-25141-02	25	7.5	370
43-25141-04	25	7.5	440
43-25141-05	30	7.5	440
43-25141-06	35	7.5	440
43-25141-03	40	7.5	370
43-25141-07	40	7.5	440
43-25141-09	45	7.5	370
43-25141-10	50	7.5	440
43-25141-11	55	7.5	440
43-25141-08	60	7.5	440
43-25141-01	80	7.5	370
43-25141-13	80	7.5	440