



751 EXPANDED PERFORATED SUPPLY W/ FIBERGLASS BACK




- 1/4" economy molded insulation back
- Fits 24" x 24" T-Bar Grid
- Four-way fixed deflector
- Use up to 16" spin-in or tab collar for duct connection
- Bright White finish

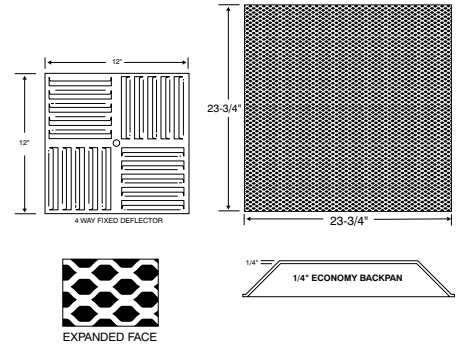


Model	Material	Damper
751	Steel	none

752 EXPANDED PERFORATED SUPPLY W/ FIBERGLASS BACK




- 1/4" economy molded insulation back
- 6" (360 °) deflector disc
- Fits 24" x 24" T-Bar Grid
- Use up to 16" spin-in or tab collar for duct connection
- Bright White finish

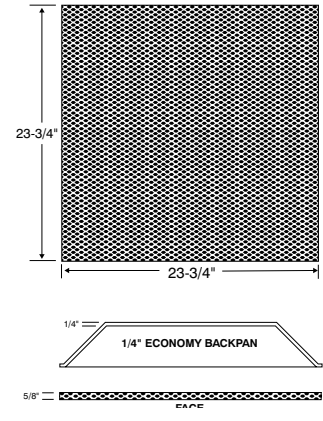


Model	Material	Damper
752	Steel	none

762A EXPANDED PERFORATED SUPPLY W/ FIBERGLASS BACK



- R6 molded insulation back
- 6" (360 °) deflector disc
- Fits 24" x 24" T-Bar Grid
- Use up to 16" spin-in or tab collar for duct connection
- Bright White finish

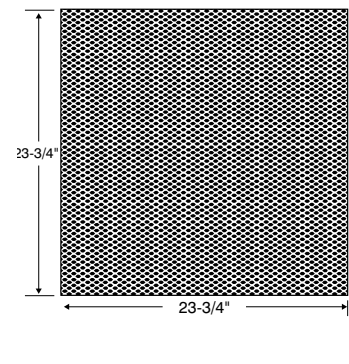

Model	Material	Damper
762A	Steel	none