


Sediment Cartridges

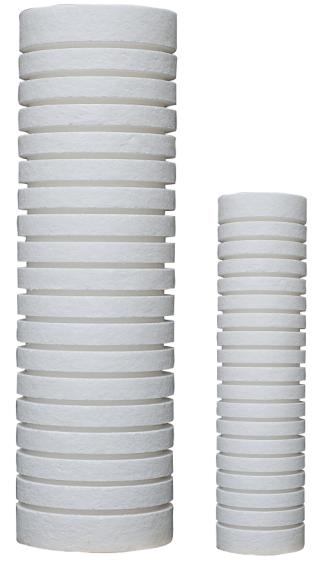

Polypropylene String Wound

- Ideal for well water installations
- Depth filtration
- Reduction of sand, silt, scale, & rust particles
- Maximum temperature 100°F
- Individually shrink wrapped

Poly-Bonded

- 100% polypropylene construction
- Micro-fiber design
- With stands high pressure differentials
- Provides depth filtration
- Maximum temperature 140°F
- Individually shrink wrapped

Grooved Poly-Bonded

- Provides a gradient density for high dirt-holding capacity superior sediment filtration
- 100% pure polypropylene
- Large surface area
- Excellent bacteria & chemical resistance
- Maximum temperature 140°F
- Individually shrink wrapped

Part Number	Size D x L	Micron Rating	Max Flow	Case Qty
SW1001-24	2.5 x 10	1	8 gpm	24
SW1005-24	2.5 x 10	5	8 gpm	24
SW1010-24	2.5 x 10	10	10 gpm	24
SW1020-24	2.5 x 10	20	10 gpm	24
SW2005-30	2.5 x 20	5	16 gpm	30
SW2010-30	2.5 x 20	10	20 gpm	30
SW2020-30	2.5 x 20	20	20 gpm	30
SWJ1005-9	4.5 x 10	5	12 gpm	9
SWJ1010-9	4.5 x 10	10	12 gpm	9
SWJ1020-9	4.5 x 10	20	12 gpm	9
SWJ2005-9	4.5 x 20	5	24 gpm	9
SWJ2010-9	4.5 x 20	10	24 gpm	9
SWJ2020-9	4.5 x 20	20	24 gpm	9

Part Number	Size D x L	Micron Rating	Max Flow	Case Qty
PB0505-24	2.5 x 05	5	3 gpm	24
PB0510-24	2.5 x 05	10	3 gpm	24
PB0520-24	2.5 x 05	20	3 gpm	24
PB1005-24	2.5 x 10	5	10 gpm	24
PB1010-24	2.5 x 10	10	10 gpm	24
PB1020-24	2.5 x 10	20	10 gpm	24
PB2005-24	2.5 x 20	5	20 gpm	24
PB2010-24	2.5 x 20	10	20 gpm	24
PB2020-24	2.5 x 20	20	20 gpm	24
PBJ1005-9	4.5 x 10	5	12 gpm	9
PBJ1010-9	4.5 x 10	10	12 gpm	9
PBJ1020-9	4.5 x 10	20	12 gpm	9
PBJ2005-9	4.5 x 20	5	24 gpm	9
PBJ2010-9	4.5 x 20	10	24 gpm	9
PBJ2020-9	4.5 x 20	20	24 gpm	9

Part Number	Size D x L	Micron Rating	Max Flow	Case Qty
GB0505-24	2.5 x 05	5	3 gpm	24
GB0510-24	2.5 x 05	10	3 gpm	24
GB0520-24	2.5 x 05	20	3 gpm	24
GB1005-24	2.5 x 10	5	10 gpm	24
GB1010-24	2.5 x 10	10	10 gpm	24
GB1020-24	2.5 x 10	20	10 gpm	24
GB2005-24	2.5 x 20	5	20 gpm	24
GB2010-24	2.5 x 20	10	20 gpm	24
GB2020-24	2.5 x 20	20	20 gpm	24
GBJ1005-9	4.5 x 10	5	12 gpm	9
GBJ1010-9	4.5 x 10	10	12 gpm	9
GBJ1020-9	4.5 x 10	20	12 gpm	9
GBJ2005-9	4.5 x 20	5	24 gpm	9
GBJ2010-9	4.5 x 20	10	24 gpm	9
GBJ2020-9	4.5 x 20	20	24 gpm	9