


# Sediment Cartridges



## Polyester Pleated

- Cleanable & reusable
- Excellent for municipal & well water
- Large surface area
- High flow rates
- Resistant to bacterial growth
- Maximum Temp. 100°F
- Individually wrapped

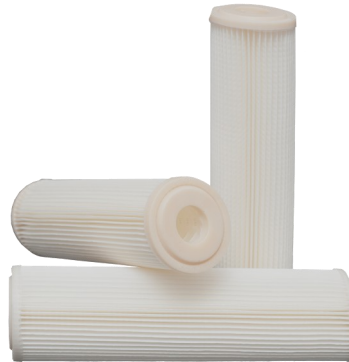


## Cellulose Pleated

- Economically priced sediment cartridge for municipal/ chlorinated water only (not recommended for well water)
- Maximum Temp. 100°F
- Individually wrapped

Part Number	Size D x L	Micron Rating	Max Flow	Case Qty
PP1005-24	2.5 x 10	5	12 gpm	24
PP1010-24	2.5 x 10	10	12 gpm	24
PP1020-24	2.5 x 10	20	12 gpm	24
PP2005-24	2.5 x 20	5	24 gpm	24
PP2010-24	2.5 x 20	10	24 gpm	24
PP2020-24	2.5 x 20	20	24 gpm	24
PPJ1005-9	4.5 x 10	5	20 gpm	9
PPJ1010-9	4.5 x 10	10	20 gpm	9
PPJ1020-9	4.5 x 10	20	20 gpm	9
PPJ2005-9	4.5 x 20	5	35 gpm	9
PPJ2010-9	4.5 x 20	10	35 gpm	9
PPJ2020-9	4.5 x 20	20	35 gpm	9

Part Number	Size D x L	Micron Rating	Max Flow	Case Qty
PC1005-24	2.5 x 10	5	12 gpm	24
PC1010-24	2.5 x 10	10	12 gpm	24
PC1020-24	2.5 x 10	20	12 gpm	24
PC2005-24	2.5 x 20	5	24 gpm	24
PC2010-24	2.5 x 20	10	24 gpm	24
PC2020-24	2.5 x 20	20	24 gpm	24
PCJ1005-9	4.5 x 10	5	20 gpm	9
PCJ1010-9	4.5 x 10	10	20 gpm	9
PCJ1020-9	4.5 x 10	20	20 gpm	9
PCJ2005-9	4.5 x 20	5	35 gpm	9
PCJ2010-9	4.5 x 20	10	35 gpm	9
PCJ2020-9	4.5 x 20	20	35 gpm	9

# Inline Carbon Filters

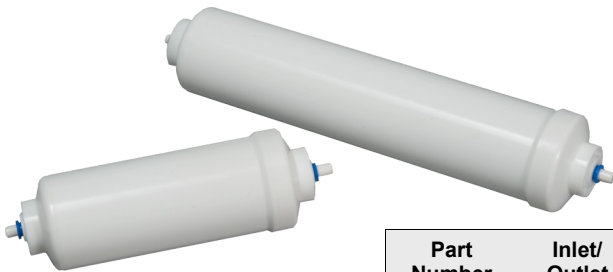

## Inline Filters

- 6" & 10" lengths available
- Choice of threaded or quick release connectors
- 1/4" and 3/8" connections
- Maximum Temp. 100°F

Part Number	Inlet/Outlet	Micron Rating	Max Flow	Length	Case Qty
IC06Q-12	1/4" JG	5	1 gpm	6"	12
IC06Q-38	3/8" JG	5	1 gpm	6"	1
IC06T	1/4" FNPT	5	1 gpm	6"	1
IC10Q-12	1/4" JG	5	1 gpm	10"	12
IC10T-12	1/4" FNPT	5	1 gpm	10"	12