


MC and AC Cable Fittings

Armor-gripping saddle stays open by itself when cable is being inserted!

Two-Screw Connectors

- Formed steel body
- Carefully round bushing




CAT. NO.	CABLE OPENING (IN.)		TRADE SIZE	K.O. SIZE	DIMENSIONS (IN.)		
	MAX.	MIN.			A*	B	C
3301-TB**	.656	.250	3/8"	1/2"	3/32"	1 1/16"	1 1/16"
3312-TB	.937	.500	1/2"	1/2"	1 1/32"	1 1/8"	1 1/8"

** UL Listed for armored cable only. UL File No. E 1383
CSA File No. 2884



TITE-BITE® design holds flexible metal cable firmly in place with a single screw!

Adapter — EMT to Flex

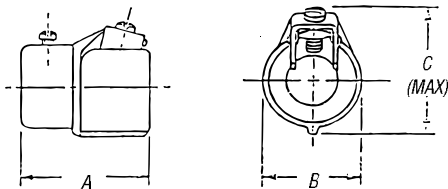

CAT. NO.	SIZE	DIMENSIONS (IN.)		
	FLEX TO EMT	A	B	C
503TB	1/2" - 1/2"	1 21/32"	1 1/16"	1 1/8"
504	3/4" - 3/4"	1 25/32"	1 1/16"	2 1/8"
505-TB	1" - 1"	2 1/32"	2 1/16"	2 5/8"

CSA File No. 8994
UL File No. E-23018

Smooth plastic bushing protects conductor insulation from rough edges of armored cable and flexible metal conduit!

Anti-Short Bushing




CAT. NO.	SIZE (AWG)
390	#14-2, #14-3, #12-2
391	#14-4, #12-3, #6-1, and #4-1
392	#12-4, #10-2, #10-3 and #2-1
393	#10-4, #8-2, #8-3, and #1-1
394	#8-4, #6-2, #6-3, #4-2, #4-3, and #6-4

Colorized. CSA File No. 589
Temperature Rating: 240° F. UL not applicable.

For flexible metal conduit and armored cable.

Duplex Clamp Connector

- Malleable iron construction




CAT. NO.	K.O. SIZE	DIMENSIONS (IN.)	
		A	B
291-TB	1/2"	1 13/32"	1 11/16"

UL File No. E 1383
CSA File No. 2884

One-piece fitting couples 3/8" flexible metal conduit to 1/2" EMT!

Combination Coupling



CAT. NO.	SIZE	DIMENSIONS (IN.)		
	FLEX TO EMT	A	B	C
449-TB	3/8" - 1/2"	1 21/32"	1 11/32"	1 9/16"

Cable opening: max. .656, min. .250.
UL File No. E-23018
CSA File No. 2884

Fast and easy installation!

Strap

- Elongated bolt hole makes alignment easy, even when holes in mounting surface are off center
- Snap-on design holds strap in place



CAT. NO.	SIZE
65-TB	3/8" Flex