


BISMAT[®] Flash

(A 05 200)


for metal pipes 3/8 - 1 1/2

3/8"

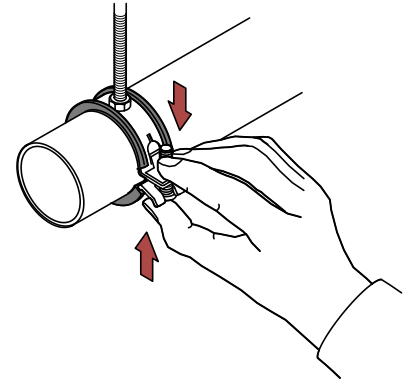

Features and benefits

- single screw clamp
- with BISMAT[®] Flash quick locking system
- clamp easy to close with one hand
- the locking screw can be secured without use of tools
- material: steel
- zinc plated
- noise insulating lining, EPDM rubber, black
- age resistant lining
- sound insulating lining according DIN 4109
- tested for fire safety
- Plenum rated - tested to ASTM E-84



Part No.	D (mm)	IP (")	CT (")	G	B (")	H (")	h (")	b x s (mm)	Fa,z (lbs)	Pack 1
CR 337 9 018	15 - 18	3/8	1/2	3/8"	1.9	1.4	0.87	20 x 1.25	180	50
CR 337 9 023	20 - 23	1/2	3/4	3/8"	2.1	1.5	0.91	20 x 1.25	180	50
CR 337 9 028	25 - 28	3/4	1	3/8"	2.3	1.7	1.00	20 x 1.25	180	50
CR 337 9 035	31 - 35	1	1 1/4	3/8"	2.6	2.0	1.20	20 x 1.25	180	50
CR 337 9 043	40 - 43	1 1/4	1 1/2	3/8"	2.9	2.4	1.30	20 x 1.25	180	50
CR 337 9 051	48 - 51	1 1/2	-	3/8"	3.2	2.6	1.50	20 x 1.25	180	50

The max. allowed load (Fa,z) is calculated using specific statistical methods related to the breaking load, taking into account a deflection of 1.5 mm or 2% of the maximum nominal clamp diameter.

