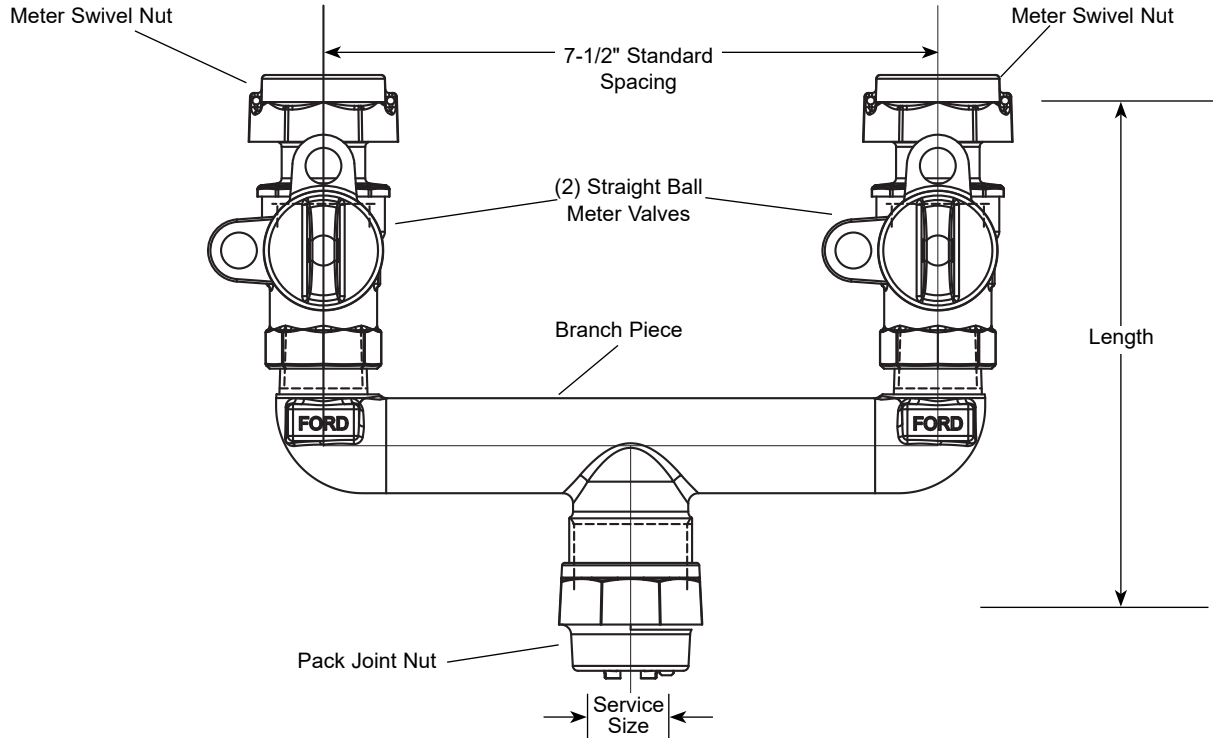# SUBMITTAL INFORMATION

Straight Ball Valve Branch Assembly - *(UVBS43-xxW-NL style)*

PACK JOINT FOR COPPER OR PLASTIC TUBING (CTS) INLET BY TWO METER SWIVEL NUT OUTLETS

Meter Swivel Nut

Meter Swivel Nut

7-1/2" Standard Spacing

(2) Straight Ball Meter Valves

Branch Piece

Length

Pack Joint Nut

Service Size

Service Size	Meter Size	Length	Approx. Wt. Lbs.	Components		Assembly	✓ Submitted Item(s)
				Branch Piece	Valves (2)	Catalog Number	
3/4"	5/8"	5-3/4"	4.4	U48-33-NL	B13-231W-NL	UVBS43-31W-NL	
3/4"	5/8" x 3/4" or 3/4"	5-3/4"	4.5	U48-33-NL	B13-232W-NL	UVBS43-32W-NL	
1"	5/8"	5-7/8"	4.2	U48-43-NL	B13-231W-NL	UVBS43-41W-NL	
1"	5/8"	5-7/8"	4.0	U48-43-65-NL	B13-231W-NL	*UVBS43-41W-65-NL	
1"	5/8" x 3/4" or 3/4"	5-7/8"	4.4	U48-43-NL	B13-232W-NL	UVBS43-42W-NL	
1"	5/8" x 3/4" or 3/4"	5-7/8"	4.2	U48-43-65-NL	B13-232W-NL	*UVBS43-42W-65-NL	
1-1/2"	5/8" x 3/4" or 3/4"	6-1/4"	5.9	U48-63-NL	B13-232W-NL	UVBS43-62W-NL	

* Available with 6-1/2" spacing between centers of meter valves. Add "-65" to catalog number.
Note: Ford recommends using insert stiffeners with plastic pipe and tubing.

FEATURES
- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- All branch valve assemblies have padlock wings
- Meter gaskets are furnished with all branch valve assemblies
- Meets high pressure service line requirements of AWWA Standard C800
- Conforms to AWWA C700 for meter threads
  Optional full 360° tee-head rotation. Add "R" to end of catalog number.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.

Submitted By: