

# PEERLESS


Mounting without escutcheon plate:

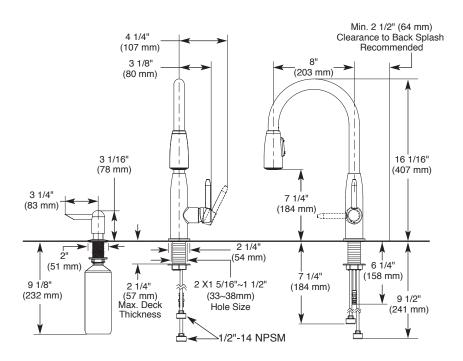

### Mounting with escutcheon plate:

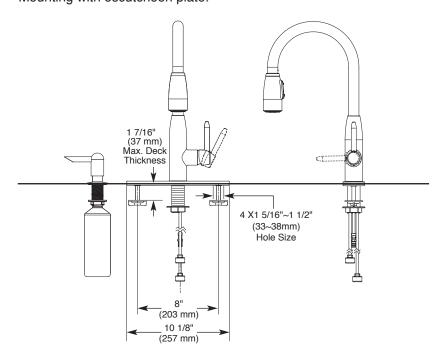

# P188103LF P188103LF-SD



#### KITCHEN FAUCET

- Single handle pull-down
- 1, 2, 3 or 4 Hole Sink Applications

#### STANDARD SPECIFICATIONS

- Maximum flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa.
- Single handle, 2-function pull-down kitchen faucet for exposed mounting on 1, 2, 3 and 4 hole sinks.
- 16 1/16" (407 mm) high, 8" (203 mm) long spout, swings 360°.
- Pull-down wand operates in an aerated or spray mode via a toggle diverter.
- Integral check valves in hose assembly.
- Hose travels inside mounting shank so it will not interfere with deck edges.
- 1/2"-14 NPSM threaded male inlet adapters.
- Lever handle with ceramic cartridge.
- Model P188103LF-SD includes soap dispenser

## **WARRANTY**

 Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.

#### **COMPLIES WITH**

• ASME A112.18.1/CSA B125.1

Indicates compliance to ICC/ANSI A117.1