




QEPMF_

**F1960 EXPANSION CR MULTIPOST TEE - FLOW-THRU
EX PEX MAINS WITH EX PEX OUTLETS**


SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

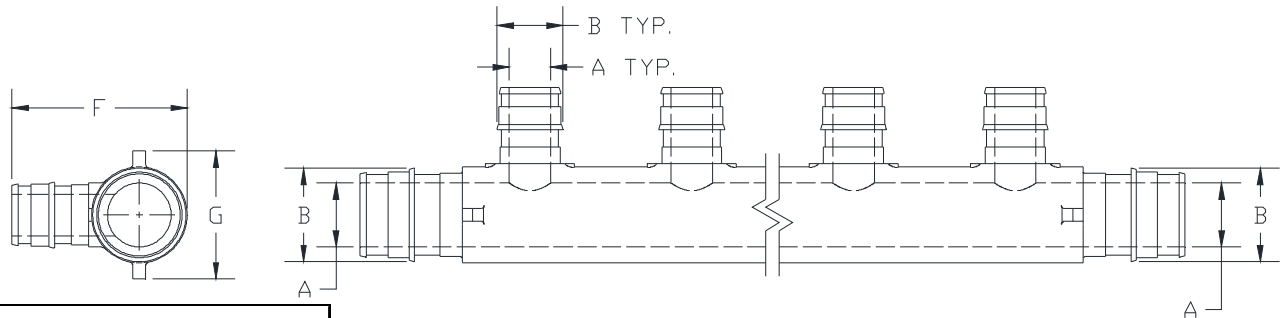

| TYPICAL CONNECTION SIZE | | |
|-------------------------|-----------|-----------|
| Tee Port Size | A | B |
| | in [mm] | in [mm] |
| 1/2" EX PEX | 0.39 [10] | 0.61 [16] |
| 3/4" EX PEX | 0.59 [15] | 0.87 [22] |
| 1" EX PEX | 0.79 [20] | 1.11 [28] |
| 1-1/4" EX PEX | 0.97 [25] | 1.36 [34] |
| 2" EX PEX | 1.48 [38] | 2.08 [53] |

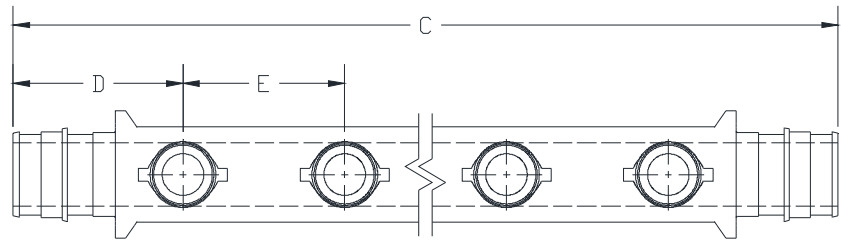

| Part Number | CR Expansion Multiport Tee Size EX PEX Mains x EX PEX Outlets | Dimensions in Inches [mm] | | | | |
|-------------|--|---------------------------|-----------|----------------|-----------|-----------|
| | | C | D | E | F | G |
| QEPMF443-2 | Mains 3/4" x 3/4", (2) 1/2" Outlets | 4.40 [112] | 1.58 [40] | 1.25 [32] TYP. | 1.62 [41] | 1.18 [30] |
| QEPMF443-3 | Mains 3/4" x 3/4", (3) 1/2" Outlets | 5.65 [144] | 1.58 [40] | 1.25 [32] TYP. | 1.62 [41] | 1.18 [30] |
| QEPMF443-4 | Mains 3/4" x 3/4", (4) 1/2" Outlets | 7.65 [194] | 1.58 [40] | 1.50 [38] TYP. | 1.62 [41] | 1.18 [30] |
| QEPMF443-6 | Mains 3/4" x 3/4", (6) 1/2" Outlets | 9.40 [239] | 1.58 [40] | 1.25 [32] TYP. | 1.62 [41] | 1.18 [30] |
| QEPMF543-3 | Mains 1" x 3/4", (3) 1/2" Outlets | 5.89 [150] | 1.81 [46] | 1.25 [32] TYP. | 1.84 [47] | 1.50 [38] |
| QEPMF543-4 | Mains 1" x 3/4", (4) 1/2" Outlets | 7.14 [181] | 1.81 [46] | 1.25 [32] TYP. | 1.84 [47] | 1.50 [38] |
| QEPMF543-6 | Mains 1" x 3/4", (6) 1/2" Outlets | 9.64 [245] | 1.81 [46] | 1.25 [32] TYP. | 1.84 [47] | 1.50 [38] |
| QEPMF553-4 | Mains 1" x 1", (4) 1/2" Outlets | 7.37 [187] | 1.81 [46] | 1.25 [32] TYP. | 1.84 [47] | 1.50 [38] |
| QEPMF553-6 | Mains 1" x 1", (6) 1/2" Outlets | 9.87 [251] | 1.81 [46] | 1.25 [32] TYP. | 1.84 [47] | 1.50 [38] |
| QEPMF664-3 | Mains 1-1/4" x 1-1/4", (3) 3/4" Outlets | 8.19 [208] | 2.34 [60] | 1.75 [44] TYP. | 2.29 [58] | 1.69 [43] |
| QEPMF885-3 | Mains 2" x 2", (3) 1" Outlets | 10.54 [268] | 3.27 [83] | 2.00 [51] TYP. | 3.28 [83] | 2.52 [64] |

Engineering Specification: Zurn PEX® CR Polymer F1960 Expansion Multiport Tee.

The QEPMF_ is used with Zurn Non-Barrier PEX tubing in potable water applications. Molded from PPSU, these fittings, as a system with Zurn PEX® tube and Zurn PEX reinforcing rings are pressure rated at 160 PSI at 73°F, 100 PSI at 180°F, and 80 PSI at 200°F. These fittings are 3rd Party certified as complying with the following standards: NSF/ANSI Standard 14, NSF/ANSI Standard 61, NSF/ANSI Standard 372 (Low Lead), ASTM F1960, CSA B137.5.

Accessories

- ___ QER3X 1/2" PEX Expansion Reinforcing Ring w/Stop
- ___ QER4X 3/4" PEX Expansion Reinforcing Ring w/Stop
- ___ QER5X 1" PEX Expansion Reinforcing Ring w/Stop
- ___ QER6X 1-1/4" PEX Expansion Reinforcing Ring w/Stop
- ___ QER8X 2" PEX Expansion Reinforcing Ring w/Stop
- ___ QEMT345 F1960 Manual Expansion Tool Kit - 1/2" to 1"