
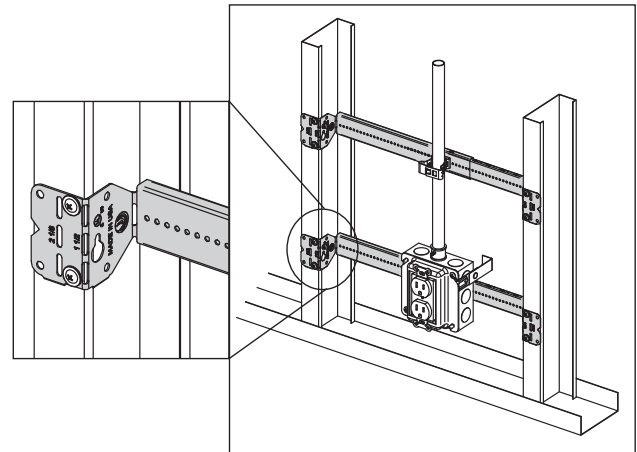


Available Finishes / Materials:
PG -- Pre-Galvanized zinc
Standard Finish: PG

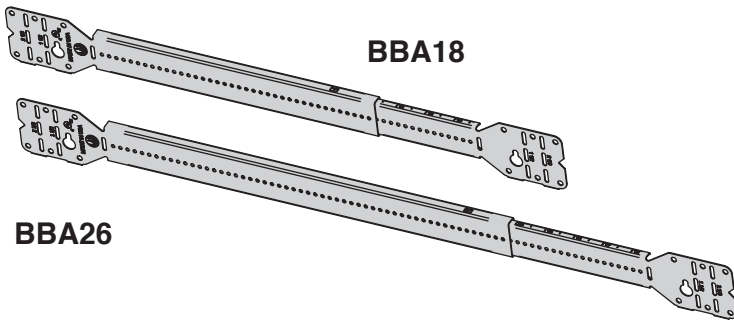

- Complete adjustability for infinite stud spacings.
- Requires only a screw gun to install.
- Pre-punched holes allow easy box or conduit attachment.
- Stud spacing scale stamped on bracket for precise preassembly.
- Locking tabs prevent disassembly.
- Use with STS8 screws, see page 72.
- **Material:** Steel
- **Finish:** Pregalvanized

| Catalog No. | Stud Centers | Distance Between Studs | Box Depth | Box Qty |
|-------------|--------------|------------------------|------------------|---------|
| BBA18 | 11" to 18" | 10" to 16-3/4" | 1-1/2" or 2-1/8" | 20 |
| BBA26 | 16" to 26" | 14" to 25-1/4" | 1-1/2" or 2-1/8" | 20 |

Material Specifications and Finishes

Carbon Steel – ASTM A1011-00 SS GR 33 or ASTM A1011-00CS Type B
PG – ASTM A653 G-90 Pre-galvanized zinc is produced by continuously rolling steel coils or sheets through molten zinc at the mills. The coils or sheets are slit to size and fabricated by forming, shearing or punching to produce the finished product. During fabrication cut edges are not generally zinc coated; however, the zinc near the uncoated metal becomes a sacrificial anode to protect the bare areas.

Note: Specifications subject to change without notice.

| | | |
|----------------------|-----------------|---------------|
| Project: | Date: | Phone: |
| Submitted By: | Address: | |
| Comment | | |