


PORTSMOUTH® TWO-HANDLE BAR SINK FAUCET



MODEL NUMBER:

- 4285.420 Bar Faucet
- 4285.420.F15 Bar Faucet

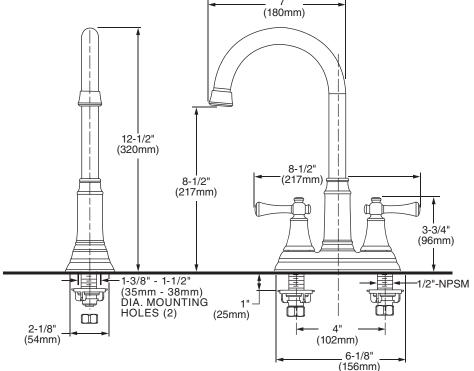

GENERAL DESCRIPTION:

Durable brass construction. 1/4 turn washerless ceramic disc valve cartridges. One-half inch male inlet shanks with brass coupling nuts. Brass swivel spout (360° rotation). Brass escutcheon plate. 2.2 gpm/8.3 L/min. maximum flow rate, 1.5 gpm/5.7 L/min, maximum flow rate for F15 models.

PRODUCT FEATURES:

Brass Construction & Cast Brass Waterway: Durable - Excellent in high use applications. Ideal for prolonged contact with water.

Ceramic Disc Valve Cartridges: Assures a lifetime of drip-free performance.

Lead Free: Faucet contains ≤ 0.25% total lead content by weighted average.

Choice of finishes: Available in a wide range of durable finishes.

SUGGESTED SPECIFICATION:

Two handle bar sink faucet shall feature brass construction with all brass inlet shanks and coupling nuts. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Fitting shall be American Standard Model # 4285.420.____.

© 2014 AS America Inc. Revised 3/14




PORTSMOUTH® TWO-HANDLE BAR SINK FAUCET


CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ASME A112.18.1 CSA B 125 NSF 61/Section 9 & Annex G ANSI A117.1

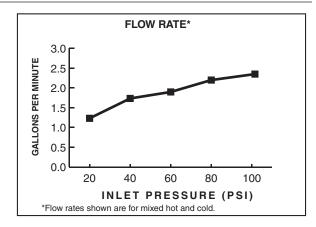

2.2gpm/8.3L/min. FLOW RATE

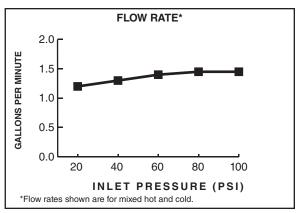

1.5 gpm/5.7 L/min. FLOW RATE

	Description	Finish Options		
Product Number		Polished Chrome	Stainless Steel (PVD)	Oil Rubbed Bronze
		002	075	224
4285.420	Two Handle Bar Faucet - 2.2 gpm/8.3 L/min. maximum flow rate			
4285.420.F15	Two Handle Bar Faucet - 1.5 gpm/5.7 L/min. maximum flow rate			

Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.

© 2014 AS America Inc.

Revised 3/14