

FEATURES & SPECIFICATIONS

INTENDED USE — Specification-grade static T8 luminaires provide general illumination for recessed applications. **Certain airborne contaminants can diminish integrity of acrylic.** [Click here for Acrylic Environmental Compatibility table for suitable uses.](#)

CONSTRUCTION — Standard door is flush steel with mitered appearance — completely frames shielding. Corners screwed together for rigidity, easy lens replacement. Urethane foam gasket eliminates light leaks between door frame and housing. Integral T-bar safety clips hold T-bar securely; no fasteners required to install.

Finish: Five-stage iron phosphate pre-treatment ensures superior paint adhesion. Painted parts finished with high-gloss, baked white enamel.

ELECTRICAL — Thermally protected, resetting, Class P, HPF, non-PCB, UL listed ballast is standard. Energy-saving electronic ballasts are sound rated A. Luminaire is suitable for damp locations, AWM, TFN, THHN, wire used throughout, rated for required temperature.

LISTINGS — UL Listed.

WARRANTY — 1-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx


Note: Specifications subject to change without notice.

Catalog Number
Notes
Type



General Purpose T8 Troffer

2GT8 2'X2' NY

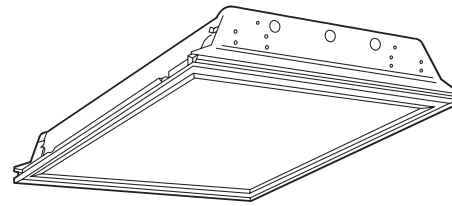

2, 3 or 4 Lamps
Compact Fluorescent,
Narrow U-Lamps,
Straight Lamps

Specifications

Length: 24 (609)

Width: 24 (609)

Depth: 4-1/4 (114)

Weight: 15 lbs (6.8 kg)

All dimensions are inches (millimeters) unless otherwise indicated.

ORDERING INFORMATION

For shortest lead times, configure product using **standard options (shown in bold)**.

Example: 2GT8 2 U316 A12 MVOLT GEB10IS NY3

2GT8					A12			
Series	Trim type	Number of lamps	Lamp type	Door frame	Diffuser type	Voltage	Options	
2GT8	2' wide	(blank) Grid	2 17 17W T8 (24") 3 U31 31W T8 (24") 4' U316 31W T8 (6" leg, 24") Not included. CF40 40W TTS (24")	(blank) Flush steel, white	A12 #12 pattern acrylic	MVOLT²	1/4 1/3 GEB10IS EL PWS90N1836 LP___ NY3	One 4-lamp ballast One 3-lamp ballast Electronic ballast, ≤10% THD, instant start Emergency battery pack (nominal 300 lumens) 6' prewire, 3/8" dia., 18-gauge, 3 wires Lamped; specify lamp type and color New York City, Local 3


Accessories: Order as separate catalog number.	
DGA22	Drywall grid adaptor

Notes

- 17W T8 only.
- MVOLT standard for 120V and 277V applications.

2GT8 2'x2' NY Static T8 Troffer

MOUNTING DATA

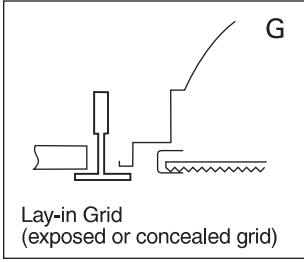

DIMENSIONS

