

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

3360 / 3362 Cut-to-Length Copper Tubing

Use: For use in potable water distribution systems in accessible locations only


Design Features:

- **One-piece construction**
- **Cut-to-Length** for clean, professional installation
- **100% Compliant** to California and Vermont "low-lead" requirements

Operating Specifications:

Temperature 40° F to 180° F
Pressure: 125 psi maximum

Tubing Diameter: 0.375" or 0.50" O.D.

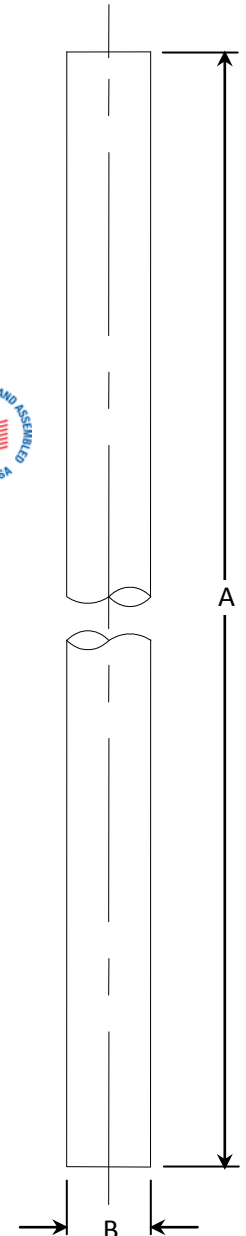

MATERIAL SPECIFICATIONS	
Tube	C12200 copper per ASTM B-68

PART DIMENSIONS (Inches)		
Model	DIM. A	DIA. B
3360	36.0	3/8
3362	36.0	1/2

Part Listing:

- 3360 C 3/8" O.D. Dead Soft Copper Tube, chrome plated
- 3360 CBT 3/8" O.D. Dead Soft Copper Tube, chrome plated, bulk
- 3360 R 3/8" O.D. Dead Soft Copper Tube, rough finish
- 3362 C 1/2" O.D. Dead Soft Copper Tube, chrome plated
- 3362 R 1/2" O.D. Dead Soft Copper Tube, rough finish

Listings & Certifications:

- IAPMO listed to ASME A112.18.1-2005 / CSA B125.1-2005 (File # 0645)
- CSA approved to California Health & Safety Code 116875 and Vermont Bill S.152 (Project # 2174785)



This specification and all information contained herein is the confidential and exclusive property of Brass-Craft Mfg, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.