



# PRO Series® Food Waste Disposers



## PRO 1000LP® Evolution Series®

Superior performance in a low profile design.

### Submittal Sheet

Superior performance in a low profile design.

- **SoundSeal®** technology delivers quieter performance. Hold a conversation with elevated voices in the same room.
- **MultiGrind®** technology delivers 3 stages of grind vs. 1 stage in standard disposer.
- Exclusive **Jam-Sensor®** Circuit feature. Increases motor torque 500% to automatically break through the toughest jams.
- Includes sound-reducing **Quiet Collar®** Sink Baffle containing antimicrobial material.
- Made in USA exclusively for professional plumbing contractors.

### Sample Specification

Food Waste Disposer(s) shall be InSinkErator Model PRO 1000LP® with MultiGrind® and SoundSeal® technologies, 1 HP motor, Auto-Reverse Grind System® feature, Stainless Steel Grind components.

#### Warranty:


**We Come To You®** 10-Year In-Home Limited Warranty.

\* The complete InSinkErator warranty is included in the Care & Use Booklet packed with each unit.

### Specifications


|                             |                                                                                                                                            |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Type of Feed                | Continuous                                                                                                                                 |
| On/Off Control              | Wall Switch                                                                                                                                |
| Motor                       | Single Phase                                                                                                                               |
| HP                          | 1                                                                                                                                          |
| Reversing                   | Auto-Reverse Grind System® feature                                                                                                         |
| Volts                       | 120                                                                                                                                        |
| HZ                          | 60                                                                                                                                         |
| RPM                         | 1725                                                                                                                                       |
| Amp. (Avg. Load)            | 10.2                                                                                                                                       |
| Time Rating                 | Intermittent                                                                                                                               |
| Lubrication                 | Permanently Lubricated Upper & Lower Bearings                                                                                              |
| Shipping Weight (Approx.)   | 22.5 lbs.                                                                                                                                  |
| Unit Finish                 | Black Enamel, Black                                                                                                                        |
| Overall Height              | 11-1/3"                                                                                                                                    |
| SoundSeal Technology        | Anti-Vibration Mount®<br>Anti-Vibration Tailpipe Mount™<br>Antimicrobial Quiet Collar® Sink Baffle<br>Multi-Layer SoundLimiter™ Insulation |
| MultiGrind Technology       | GrindShear Ring®<br>TriAction Lug System™ feature<br>Undercutter Disk®<br>JamSensor® Circuit                                               |
| Grind Chamber Capacity      | 34.6 oz.                                                                                                                                   |
| Motor Protection            | Manual Reset Overload                                                                                                                      |
| Average Water Usage         | Approx. 1 Gallon Per Person Per Day                                                                                                        |
| Avg. Electrical Usage       | 3-4 KWh Per Year                                                                                                                           |
| Drain Connection            | 1-1/2" Anti-Vibration (Hose Clamp)                                                                                                         |
| Dishwasher Drain Connection | Yes                                                                                                                                        |

### Dimensions

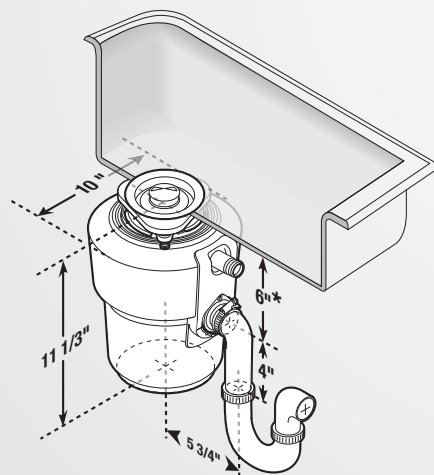

\* Add 1/2" when stainless steel sinks are used.

### Job Specifications



**MADE IN™  
USA**

Disposers are designed and manufactured in the USA with over 80% domestic content



The mark of responsible forestry  
BV-COC-080715  
© 1996 Forest Stewardship Council A.C.

**EMERSON™**  
Commercial & Residential Solutions

The Emerson logo is a trademark and service mark of Emerson Electric Co. The mounting collar configuration is a trademark of Emerson Electric Co. Quick Lock® is a registered trademark of Emerson Electric Co.

InSinkErator may make improvements and/or changes in the specifications at any time, in its sole discretion, without notice or obligation and further reserves the right to change or discontinue models.

1-800-558-5700  
www.insinkerator.com