

## Condensate Removal Pumps

# ABS SERIES Shallow-Pan Tank

1-ABS



2-ABS



### Applications

- For removal of condensate from an air conditioner drain pan or reservoir

### Features

- 1/150 hp oil-filled motor
- Epoxy-coated cast aluminum housing and motor cover
- Nylon volute
- Stainless steel shaft
- Nitrile shaft seal
- Screened intake
- Advanced mechanical switch
- Thermal overload protection
- cCSAus


### Series Specifications

**Capacity:** 205 gph @ 1' (776 lph @ 0.31 m)  
**Shut-Off:** 10' (3.0 m)  
**Liquid Temperature:** 120 °F (49 °C)  
**Discharge:** 1/4" MNPT  
**Impeller:** Nylon

**Electrical:** 115 V, 60 Hz, 1.1 A  
 230 V, 50/60 Hz,  
 0.6/0.5 A  
**Operation:** Automatic

### Model Characteristics

Item #	Model	Volts	Cord	On Level	Off Level
550521	1-ABS	115	9' 2.8 m	1-3/4"	1-1/4"
550532	1-ABS	230	11' 3.4 m	1-3/4"	1-1/4"

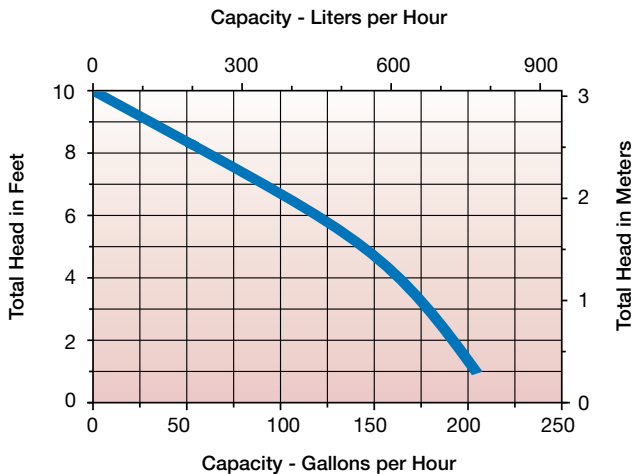

### Applications

- For removal of condensate from an air conditioner drain pan or reservoir

### Features

- 1/40 hp oil-filled motor
- Epoxy-coated cast aluminum housing
- Includes 1/2 gallon capacity mineral-filled nylon tank
- Nylon volute
- Stainless steel shaft
- Fluoroelastomer (FKM) shaft seal
- Hooded intake
- Advanced mechanical switch
- Thermal overload protection
- cCSAus

### Series Specifications

**Capacity:** 300 gph @ 1' (1136 lph @ 0.31 m)  
**Shut-Off:** 11.8' (3.6 m)  
**Liquid Temperature:** 120 °F (49 °C)  
**Discharge:** 1/4" MNPT  
**Impeller:** Nylon

**Electrical:** 115 V, 60 Hz, 1.7 A  
 230 V, 50/60 Hz,  
 0.9/0.7 A  
**Operation:** Automatic

### Model Characteristics

Item #	Model	Volts	Cord	On Level	Off Level
551020	2-ABS	115	9' 2.8 m	3" 7.6 cm	2" 5.1 cm
551030	2-ABS	230	11' 3.4 m	3" 7.6 cm	2" 5.1 cm

