




TRANSFORMER LUG KITS

Kits contain lugs and hardware for typical dry-type transformer installations
 Dual-rated lugs are suitable for copper or aluminum wire (ALCU)
 Lugs made of high-strength 6061-T6 aluminum alloy, electro-tin plated
 Lugs are UL listed and CSA certified
 Stainless steel hardware packaged in plastic bags

Dual-Rated
 600V
 90°C

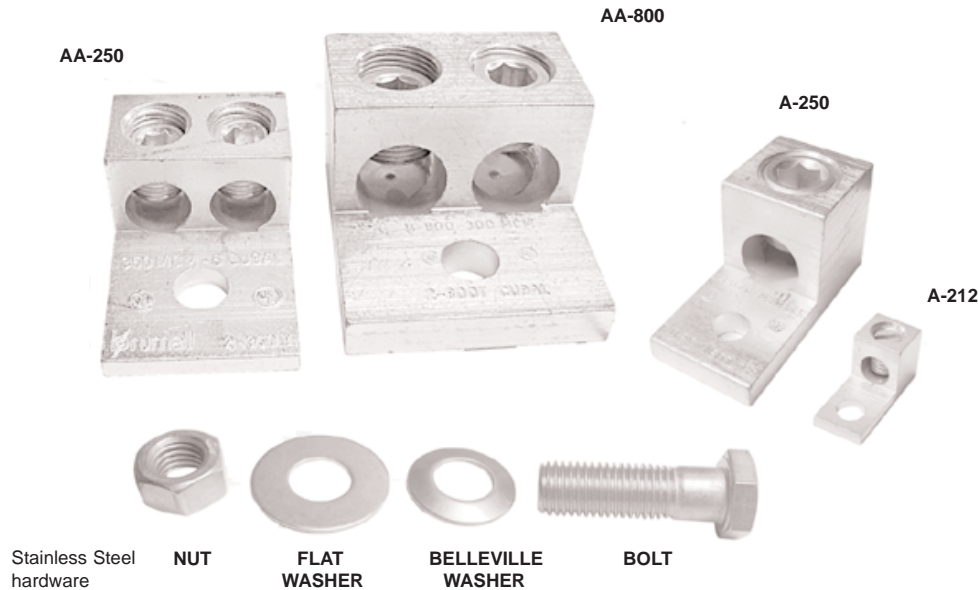

TLK SERIES

NAED NUMBER	CATALOG NUMBER	TRANSFORMER KVA SIZE	ALUM (ALCU) LUGS		ST STEEL HARDWARE (QTY) DESCRIPTION	EST. SHIPPING	
			(QTY) LUG # WIRES/LUG	WIRE RANGE		WEIGHT (lbs)	UNIT
50280	TLK-15	15-37½ 1Ø 15-45 3Ø	(8) #A-212 1 WIRE	#2-14 AWG	(8) 1/4-20X3/4 BOLT (8) 1/4 NUT (16) 1/4 FLAT WASHER	0.75	KIT
			(4) #A-250 1 WIRE	250MCM- #6AWG			
50282	TLK-75	50-75 1Ø 75-112½ 3Ø	(12) #A-250 1 WIRE	250MCM- #6AWG	(8) 1/4-20X3/4 BOLT (8) 1/4-20X2 BOLT (12) 1/4 NUT (24) 1/4 FLAT WASHER	1.9	KIT
50284	TLK-150	100-167 1Ø 150-300 3Ø	(6) #AA-350 2 WIRE	350MCM- #6 AWG	(8) 1/2-13X2 BOLT (8) 1/2-13X2 1/2 BOLT (13) 1/2 NUT (26) 1/2 FLAT WASHER (13) 1/2 BELLEVILLE WASHER	9.9	KIT
			(7) #AA-800 2 WIRE	800- 300MCM			
50286	TLK-500	400-500 3Ø	(15) #AA-800 2 WIRE	800- 300MCM	(7) 1/2-13X2 BOLT (4) 1/2-13X2 1/2 BOLT (11) 1/2-13 NUT (22) 1/2 FLAT WASHER (11) 1/2 BELLEVILLE WASHER	16.0	KIT

BLZNG or BLOX oxide-inhibitor is recommended for all aluminum terminations.
 For lug dimensions, see appropriate catalog page.
 Other kits available upon request.