

PL-L Long 4-Pin Base

PL-L 36W/841/4P

Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes, configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum effciency and sleek design solutions are required.

Product data


General Information	
Cap-Base	2G11 [2G11]
ife To 50% Failures (Nom)	15000 h
ife To 50% Failures Preheat (Nom)	20000 h
ight Technical	
Color Code	840 [CCT of 4000K]
uminous Flux (Nom)	2900 lm
Color Designation	Cool White (CW)
umen Maintenance 10000 h (Nom)	92 %
umen Maintenance 2000 h (Nom)	94 %
umen Maintenance 5000 h (Nom)	93 %
hromaticity Coordinate X (Nom)	380
hromaticity Coordinate Y (Nom)	380
orrelated Color Temperature (Nom)	4100 K
uminous Efficacy (rated) (Nom)	80 lm/W
Color Rendering Index (Nom)	82
Operating and Electrical	
Power (Rated) (Nom)	36.0 W
amp Current (Nom)	0.435 A

Voltage (Nom)	106 V
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Silicon
Cap-Base Information	4 Pins
Product Data	
Order product name	PL-L 36W/841/4P
EAN/UPC - Product	046677345136
Order code	927904508421
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	927904508421
Net Weight (Piece)	104.000 g
ILCOS Code	FSD-36/40/1B-E-2G11

Datasheet, 2016, October 10 data subject to change

PL-L Long 4-Pin Base


Dimensional drawing




Product	D (max)	D1 (max)	C (max)
PL-L 36W/841/4P	39.0 mm	18.0 mm	416.6 mm

PL-L 36W/840/4P Silicon

Photometric data

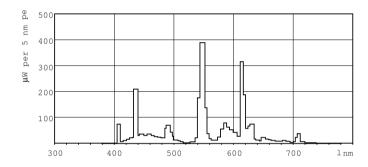

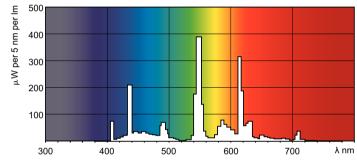

Lightcolor /840

Lightcolor /840

