

W2000 Cushion Clamp

(H 32 205)

to be used for metal pipe applications 9 - 63 mm




Features and benefits

- the new alternative to the Cushion Clamp
- one-piece design - no loose parts
- easier, faster, safer - installs with one hand
- 3-way screw head - Phillips, flat and hex
- unique design allows one clamp to fit multiple pipe sizes - less items to stock
- W Series Clamps are boxed for easy handling - no more bags
- material: steel 1.0242
- Test Reports:
 - Strength, Fire and Smoke:UL 1565 Listed
 - Noise emission:2016-SG-Bauakustik-1647-001-16
- surface treatment: high grade Zn-Mg based coating (600 hours salt spray)
- black EPDM rubber lining protects against galvanic corrosion
- noise/vibration insulating lining
- age resistant lining



Part No.	D (mm)	D / CTS (")	D / ACR (")	D / IPS (")	s (mm)	Screw	Fa,z (lbs)	ULS	ULC	Pack 1
202 5 004	9 - 10	1/4	3/8	-	1.25	1/4"	-	ULS	ULC	50
202 5 006	11 - 13	3/8	1/2	-	1.25	1/4"	200	ULS	ULC	50
202 5 008	14 - 16	1/2	5/8	1/4	1.25	1/4"	200	ULS	ULC	50
202 5 010	17 - 19	5/8	3/4	3/8	1.25	1/4"	220	ULS	ULC	50
202 5 012	20 - 22	3/4	7/8	1/2	1.25	1/4"	220	ULS	ULC	50
202 5 014	25 - 29	1	1-1/8	3/4	1.50	1/4"	400	ULS	ULC	50
202 5 016	32 - 35	1-1/4	1-3/8	1	1.50	1/4"	400	ULS	ULC	50
202 5 020	40 - 43	1-1/2	1-5/8	1-1/4	1.75	5/16"	400	ULS	ULC	25
202 5 022	48 - 50	-	-	1-1/2	1.75	5/16"	400	ULS	ULC	25
202 5 024	54 - 56	2	2-1/8	-	1.75	5/16"	400	ULS	ULC	25
202 5 026	60 - 63	-	-	2	1.75	5/16"	400	ULS	ULC	25

For additional testing information, please contact our Sales Office!

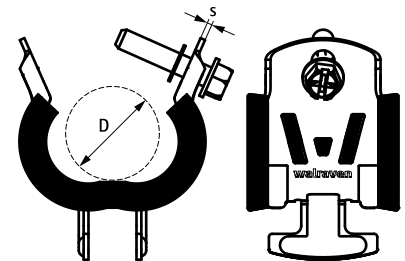

Alternative
W5000 Cushion Clamp