



SUBMITTAL INFORMATION

Adapter Flange - (UFA900-C-x series)



UNI-FLANGE® SERIES 900 ADAPTER FLANGE FOR DUCTILE IRON PIPE O.D. PVC PIPE

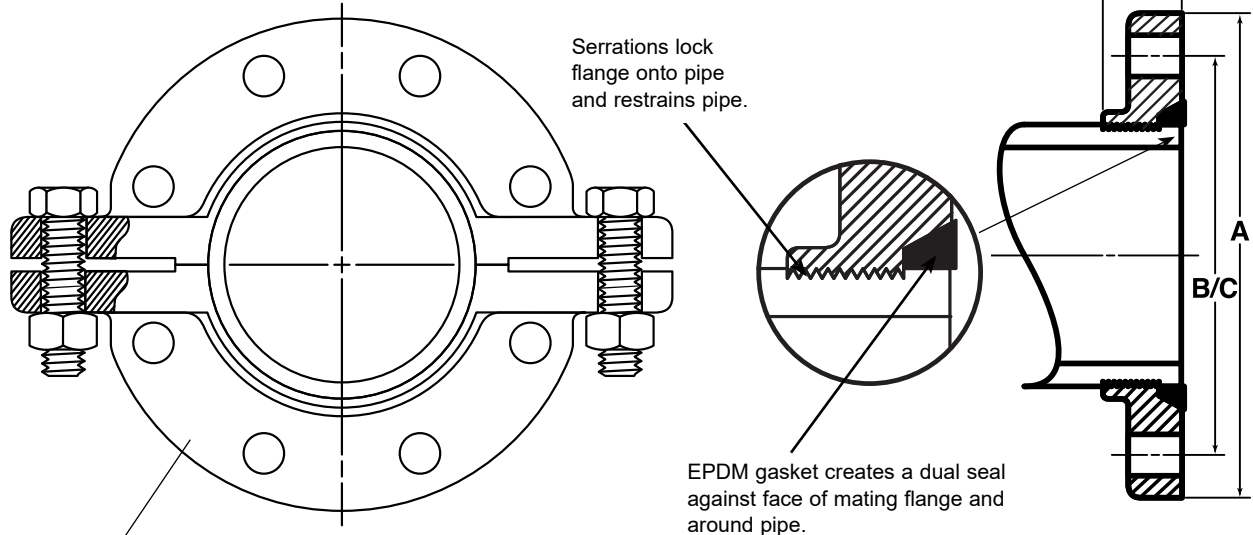

Serrations lock flange onto pipe and restrains pipe.

EPDM gasket creates a dual seal against face of mating flange and around pipe.

Flange - Ductile Iron ASTM A536 Grade 65-45-12
Finish: Shop coat
Color Code: Red for PVC with ductile iron pipe O.D.

NOM. PIPE SIZE	DUCTILE IRON PIPE		APPROX. WT. LBS.	DIMENSIONS			BOLT HOLE DIA.	FLANGE BOLTS		CLAMPING BOLTS		No. OF BOLT HOLES	✓ SUBMITTED ITEM(S)
	OD (IN.)	CATALOG No.		OD A	THICKNESS B	BOLT CENTER BC		No.	SIZE	No.	SIZE		
4"	4.80	UFA900-C-4	11	9"	1-1/2"	7-1/2"	3/4"	8	5/8"x3"	2	5/8"x3"	8	
6"	6.90	UFA900-C-6	19	11"	1-9/16"	9-1/2"	7/8"	8	3/4"x3-1/4"	2	5/8"x3"	8	
8"	9.05	UFA900-C-8	29	13-1/2"	1-7/8"	11-3/4"	7/8"	8	3/4"x3-1/2"	2	3/4"x3-1/2"	8	
10"	11.10	UFA900-C-10	39	16"	2"	14-1/4"	1"	12	7/8"x6"	2	7/8"x6"	12	
12"	13.20	UFA900-C-12	54	19"	2-3/4"	17"	1"	12	7/8"x6"	2	7/8"x6"	12	

NOM. SIZE	PIPE STANDARD	TYPE	PRESSURE RATING (PSI)
4" - 12"	AWWA C-900	DR-14	200
		DR-18	150
		DR-25	100

FEATURES

- Series 900 flanges meet all test requirements of AWWA C-900
- Flanges drilling ANSI B16.1 125 lb. / ANSI B16.5 150 lb
- Gasket is EPDM (-65° to 250° F) and is suitable for water, wastewater, ozones and strong oxidizing chemicals

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current. Our standard warranty applies.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

www.fordmeterbox.com

02/19/20

Submitted By: