













# Submittal: GHH12(3.5)LUK4DH

# Flex Match Wall Mount

#### Features:

- -Inverter-driven Variable Speed Blower
- -Flared Piping Connections
- -Wireless Remote Controller Included
- -Anti-corrosion coils
- -iFeel Operation
- -Air Filters Included
- -Turbo Cooling
- -Child Lock Function



### **Indoor Unit Data**

### Blower:

CFM (Max/Min): 400/170 Output (W): 20 RLA: 0.090 Capacitor Rating ( $\mu$ F): N/A

#### **Sound Pressure**

Cooling dB (A) (Min/Max): 29/45

## **Physical Characteristics**

 Net Weight (lbs):
 22.05

 Dimensions (in.)
 33.268

 H:
 11.378


 D:
 8.228

**Piping Connection Size** 


"Liquid": 1/4" Gas: 1/2"

Piping Note: A 3/8" to 1/2" adapter will be used at the outdoor unit. Line set will be 1/4" and 1/2".

### **Dimensions**

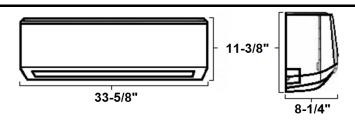

### Clearances

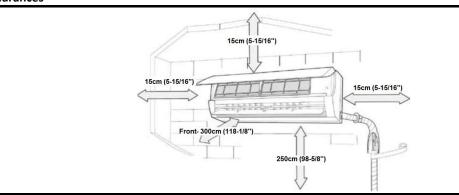

Specifications & illustrations are subject to change without notice or incurring obligations.

O'Fallon, MO ©Nortek Global HVAC, LLC 2017. All Rights Reserved. 896E (6/17)

**IDU SKU:** 

1007901