


# G SERIES

## GREASE SEPARATORS

FOR ON-THE-FLOOR OR  
PARTIALLY RECESSED  
INSTALLATION

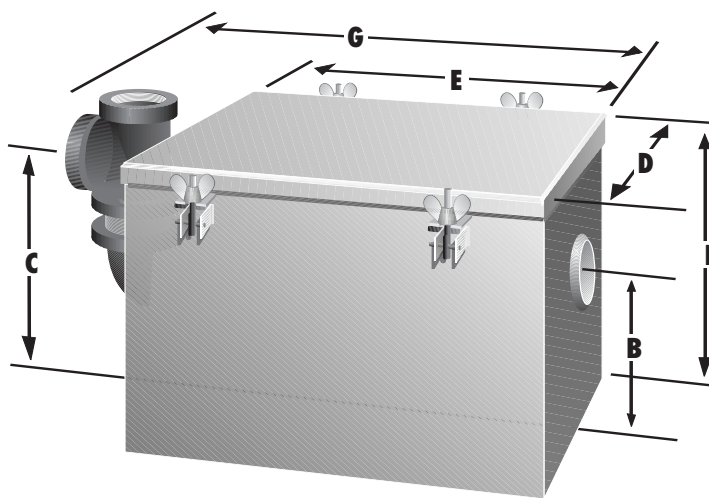

| Model          | Intermittent Flow GPM | Tapped Inlet and Outlet | Static Holding Capacity | Greasy Sludge Capacity | Bottom to Center of Inlet B | of Outlet C | Width D | Length E | Height F | Overall Length (M unit only) G | Shipping Weight |
|----------------|-----------------------|-------------------------|-------------------------|------------------------|-----------------------------|-------------|---------|----------|----------|--------------------------------|-----------------|
| <b>G-710</b>   | 5                     | 1.5"                    | 1.7gal.                 | 7lb.                   | 5.5"                        | 7.5"        | 6.75"   | 9.75"    | 9"       | —                              | 28lb.           |
| <b>G-1012</b>  | 8                     | 1.5"*                   | 3.5gal.                 | 12lb.                  | 7.63"                       | 9.63"       | 8.75"   | 10.75"   | 11.5"    | 16.75"                         | 42lb.           |
| <b>G-1412</b>  | 12                    | 2"                      | 5.3gal.                 | 18lb.                  | 8.38"                       | 10.75"      | 10.75"  | 13.25"   | 12.88"   | 18.38"                         | 58lb.           |
| <b>G-1815</b>  | 16                    | 2"                      | 10gal.                  | 60lb.                  | 11"                         | 13.75"      | 10.75"  | 19"      | 15.88"   | 24"                            | 80lb.           |
| <b>G-1820</b>  | 20                    | 2"                      | 17gal.                  | 70lb.                  | 12"                         | 15"         | 14.75"  | 20.75"   | 17.88"   | 25.75"                         | 106lb.          |
| <b>G-2420</b>  | 30                    | 3"*                     | 31gal.                  | 90lb.                  | 14.5"                       | 17.88"      | 18.75"  | 25"      | 20.63"   | 32"                            | 165lb.          |
| <b>G-2635</b>  | 35                    | 3"                      | 40gal.                  | 120lb.                 | 16.5"                       | 21"         | 18.75"  | 25"      | 25.13"   | 32"                            | 181lb.          |
| <b>G-2824</b>  | 40                    | 4"                      | 54gal.                  | 180lb.                 | 21.5"                       | 25.75"      | 20.75"  | 26.75"   | 29.38"   | 36"                            | 248lb.          |
| <b>G-3050</b>  | 50                    | 4"                      | 60gal.                  | 220lb.                 | 21.5"                       | 25.75"      | 20.75"  | 30"      | 29.88"   | 39"                            | 295lb.          |
| <b>G-3224</b>  | 60                    | 4"                      | 67gal.                  | 250lb.                 | 21.5"                       | 25.75"      | 20.75"  | 33.5"    | 29.38"   | 40"                            | 318lb.          |
| <b>G-3475</b>  | 75                    | 4"                      | 80gal.                  | 300lb.                 | 22"                         | 26.25"      | 23.25"  | 33.5"    | 30.5"    | 42"                            | 343lb.          |
| <b>G-3628</b>  | 100                   | 4"                      | 110gal.                 | 350lb.                 | 22"                         | 26.25"      | 30.5"   | 36"      | 30.13"   | 45"                            | 418lb.          |
| <b>G-23-L0</b> | 16                    | 2"                      | 10gal.                  | 65lb.                  | 6"                          | 8.75"       | 14.75"  | 20.75"   | 10.63"   | 25.75"                         | 80lb.           |
| <b>G-25-L0</b> | 20                    | 2"                      | 21gal.                  | 80lb.                  | 6.5"                        | 10.25"      | 20.75"  | 26.75"   | 13.63"   | 36"                            | 127lb.          |
| <b>G-30-L0</b> | 30                    | 3"*                     | 23gal.                  | 90lb.                  | 6.5"                        | 10.25"      | 20.75"  | 30.75"   | 13.63"   | 37.75"                         | 163lb.          |
| <b>G-36-L0</b> | 35                    | 3"*                     | 28gal.                  | 108lb.                 | 6.5"                        | 10.25"      | 20.75"  | 36.75"   | 13.63"   | 43.75"                         | 170lb.          |
| <b>G-45-L0</b> | 40                    | 3"*                     | 37gal.                  | 200lb.                 | 6.75"                       | 11"         | 20.75"  | 45"      | 16"      | 52"                            | 257lb.          |
| <b>G-50-L0</b> | 50                    | 3"*                     | 41gal.                  | 250lb.                 | 6.75"                       | 11"         | 20.75"  | 50"      | 16"      | 57"                            | 258lb.          |

\* Also available with 2" inlet and outlet.

- Separators with filter medium can be furnished
- Stainless steel also available.
- Draw-off valve available.
- Allow headroom for lifting out both screens to clean the separator.

**Job Specification:** Grease separators shall be Rockford Separators as manufactured by Rockford Sanitary Systems, Inc., Rockford, Illinois, and as noted on plans.

**Separator Specifications:** Furnish \_\_\_\_\_ Rockford Model **G-**\_\_\_\_\_ all-welded steel separators for on-the-floor (or partially recessed) installation, \_\_\_\_\_ g.p.m. intermittent flow, \_\_\_\_\_" tapped inlet and outlet with outlet vent connection, \_\_\_\_\_ lb. greasy sludge capacity, visible double-wall outside trap seal, non-removable separator screen with easily removable filter screen, gasketed cover hand-tightened to body with safety-catch bolt assemblies, enamel coating inside and outside.

**Optional Features:** Epoxy coating inside and outside. Sediment basket. Filter medium. All stainless steel construction.