




Compact Fluorescent

**6" Cone**  
**Single Lamp**  
**IC & Non-IC**

**Recessed**

Type \_\_\_\_\_  
 -31  
 P8053

Catalog No.	Finish	Lamping	Dimensions (Inches)		
	Black		A	B	C
P8053	Alzak	see below	7-3/4	6-11/32	4-3/4

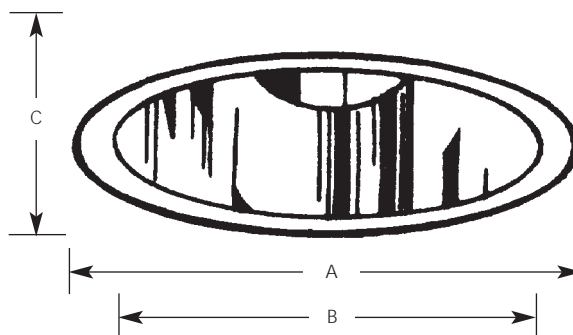

**Lamp Wattage**

Housing	IC	Non-IC
P83-AT	13w 4-pin Quad/Triple-tube CF	13w 4-pin Quad/Triple-tube CF
P83-ICAT	13w 4-pin Quad/Triple-tube CF	13w 4-pin Quad/Triple-tube CF
P88-ICAT	18w 4-pin Quad/Triple-tube CF	18w 4-pin Quad/Triple-tube CF
P183-EB	13w 4-pin Triple-tube CF	13w 4-pin Triple-tube CF
P83-26ICAT	26w 4-pin Triple-tube CF	26w 4-pin Triple-tube CF
P62-FB	N/A	26 or 32w 4-pin Triple-tube CF

**Specifications:**

Application

- Home theaters
- Dark ceiling and walled rooms

Flange

- Black Alzak
- No light leaks around trim flange
- Covers irregular ceiling openings

Trim

- Built-in bracket to accept Trim-Lok spring
- Trim-Lok action forces trim to fit snugly against the ceiling
- Socket mounts to trim for optimum performance and consistent lamp position
- Black Alzak cone

Lamps

- Maximum overall length of lamp cannot exceed 5.5" (5-1/2")
- Available are: GE-F26TBX, Phillips PLT26, Sylvania CF26 or 32DT, or Progress 7808-01 (26w)

Labels

- UL-CUL damp location listed

Progress Lighting  
 701 Millennium Blvd.  
 Greenville, South Carolina  
 29607

www.progresslighting.com

Rev. 5/08




Incandescent

**6" Cone  
Single Lamp  
IC & Non-IC**

**Recessed**

Type \_\_\_\_\_  
-31  
P8053

Catalog No.	Finish	Lamping	Dimensions (Inches)		
	Black Alzak		A	B	C
P8053	-31	see below	7-3/4	6-11/32	4-3/4

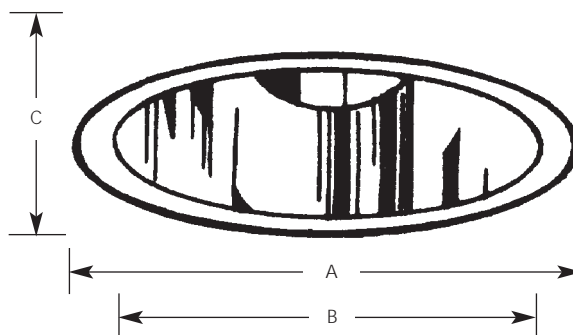

**Lamp Wattage**

Housing	IC	Non-IC
P87-AT	75PAR30/65BR30	120BR40/150PAR38/40A19
P87-ATQC	75PAR30/65BR30	120BR40/150PAR38/40A19
P187-TG	75PAR30/65BR30	120BR40/150PAR38/40A19
P821-AT	120BR40/150PAR38/100A19	120BR40/150PAR38/100A19
P821-FB, P821-FBFC	N/A	150R40/150BR40/150PAR38

**Specifications:**

Application

- Home theaters
- Dark ceiling and walled rooms

Labels

- UL-CUL damp location listed

Flange

- Black Alzak
- No light leaks around trim flange
- Covers irregular ceiling openings

Trim

- Built-in bracket to accept Trim-Lok spring
- Trim-Lok action forces trim to fit snugly against the ceiling
- Socket mounts to trim for optimum performance and consistent lamp position
- Black Alzak cone

Progress Lighting  
701 Millennium Blvd.  
Greenville, South Carolina  
29607

www.progresslighting.com

Rev. 5/08