### For Residential and Commercial Applications

Job Name	Engineer / Architect	
Job Location	Wholesaler	
Submittal Date	Contractor	

# SWB00 3/4" ID Coated Stainless Steel Water Heater Connector – Female Iron Pipe x Female Iron Pipe

**Use:** For use in exposed locations only to connect water heaters, water softeners and other water connected devices to the water supply

#### **Design Features:**

- Proprietary ProCoat® clear coat provides unrivaled corrosion protection from harsh chemicals that can cause surface deterioration and pinhole leaks.
- Full flow, maximum performance. ¾" internal diameter provides greater water flow without obstruction
- **Integrated dielectric sleeve** effectively isolates dissimilar metals within the waterway to help prevent galvanic and electrolytic corrosion
- No dielectric union needed with installation. Dielectric is built-in to the design of the connector
- Less torque to seal against the pliable rubber washer, especially on rough nipple surfaces
- Longer connector nuts allow a greater number of thread-to-thread contacts and a better seal
- 100% leak tested prior to coating application to ensure connector performance and reliability
- 100% Compliant

#### **Operating Specifications:**

*Temperature:* 40° - 180° F *Water Pressure:* 125 PSI maximum

MATERIAL SPECIFICATIONS				
Tubing	Stainless steel			
Dielectric Sleeve	Polypropylene			
Nut	Brass			
Washer	Rubber			

## Part Listing:


SWB00-12N	3/4" ID X 12" connector with 3/4" FIP x 3/4" FIP end fittings
SWB00-15N	$3/4\ensuremath{^{\prime\prime}}$ ID X 15 $\ensuremath{^{\prime\prime}}$ connector with $3/4\ensuremath{^{\prime\prime}}$ FIP x $3/4\ensuremath{^{\prime\prime}}$ FIP end fittings
SWB00-18N	$3/4\ensuremath{^{\prime\prime}}$ ID X 18 $\ensuremath{^{\prime\prime}}$ connector with 3/4 $\ensuremath{^{\prime\prime}}$ FIP x 3/4 $\ensuremath{^{\prime\prime}}$ FIP end fittings
SWB00-24N	$3/4"\ \mbox{ID X }24"$ connector with $3/4"\ \mbox{FIP x }3/4"$ FIP end fittings



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg if requested.



# SWB00 3/4" ID Coated Stainless Steel Water Heater Connector – Female Iron Pipe x Female Iron Pipe

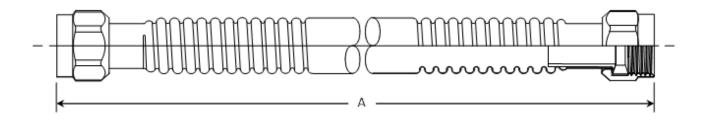

PART DIMENSIONS (Inches)							
Connector Length – Nut by Nut							
Model	Dim.	12"	15"	18"	24"		
SWB00	Δ	12.00 min.	15.00 min.	18.00 min.	24 00 min		

#### **Listings & Certifications:**

- CSA listed to ASME A112.18.6 and CSA B125.6
- IAPMO listed to ASME A112.18.6 and CSA B125.6 (File # 0452)
- Compliant product CSA listed to Low Lead Content Certification Program – Plumbing Products Class 6853-01









**BrassCro**