## For Residential and Commercial Applications

Job Name	Engineer / Architect	
Job Location	Wholesaler	
Submittal Date	Contractor	

# SWB0PS 3/4" ID Coated Stainless Steel Water Heater Connector -**Push Connect x Female Iron Pipe**

Use: For use in exposed locations only to connect water heaters, water softeners, and other water connected devices to the water supply. Compatible with PEX, copper, and CPVC.

### **Design Features:**

- Proprietary ProCoat® clear coat provides superior corrosion protection from most harsh chemicals that can cause surface deterioration and pinhole leaks
- Secure push connect connection
- No soldering or glue needed for installation
- Removes the need for additional transition fittings
- Full flow, maximum performance. 3/4" internal diameter provides greater water flow without obstruction
- Integrated dielectric sleeve effectively isolates dissimilar metals within the waterway to help prevent galvanic and electrolytic corrosion
- No dielectric union needed with installation. Dielectric is built-in to the design of the connector\*
- Less torque to seal against the pliable rubber washer, especially on rough nipple surfaces
- Longer connector nut allows a greater number of thread-to-thread contacts and a better
- 100% leak tested prior to coating application to ensure connector performance and reliability

### **Operating Specifications:**

40° - 180° F Temperature: Water Pressure: 125 PSI maximum

MATERIAL SPECIFICATIONS				
Tubing	Stainless steel			
Dielectric Sleeve	Polypropylene			
Nut	Brass, chrome plated			
Washer	Rubber			
Push Connect O-ring	Rubber			
Gripper Ring	Stainless steel			
Release Collar & Capsule	Plastic			
Tube Stiffener	Plastic			

<sup>\*</sup>Check with your local inspection office for applicable code requirements

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.


300.22 SWB0PS Coated Stainless Steel Water Heater Connectors REV 07/15




# SWB0PS 3/4" ID Coated Stainless Steel Water Heater Connector -**Push Connect x Female Iron Pipe**

### Part Listing:

Ш	SWB0PS-12N	3/4" push connect x 3/4" FIP x 12" length
	SWB0PS-15N	3/4" push connect x 3/4" FIP x 15" length
	SWB0PS-18N	3/4" push connect x 3/4" FIP x 18" length
	SWB0PS-24N	3/4" push connect x 3/4" FIP x 24" length

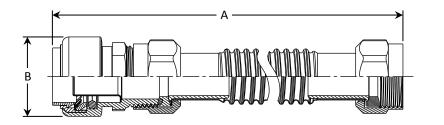



PART DIMENSIONS (Inches)						
Model	DIM. A	DIA. B	НЕХ. С			
SWB0PS-12N	13.30/14.10	1.36	1.12			
SWB0PS-15N	16.30/17.10	1.36	1.12			
SWB0PS-18N	19.30/20.10	1.36	1.12			
SWB0PS-24N	25.30/26.10	1.36	1.12			

#### **Listings & Certifications:**

- CSA listed to ASME A112.18.6 and CSA B125.6 (File # 204593)
- IAPMO listed to ASME A112.18.6 and CSA B125.6 (File # 0452)
- No-lead product CSA listed to NSF 372 (Class 6853-01)









BrassCraft<sub>®</sub>