

**For Residential and Commercial Applications**

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

## VF1-\*\*A / VF3-\*\*A Speedi Plumb® Vinyl Faucet Connector – Flare Inlet

**Use:** For use in potable water distribution systems in accessible locations only


**Design Features:**

- **No kink hose.** The specially engineered reinforced PVC hose provides unique flexibility to prevent kinking and crimping
- **Greater strength and durability** with a tighter weave and two-layer bonded construction, outperforms conventional vinyl connectors
- **Longer wing nuts** ease installation for speedier connections
- **Rubber washers** provide a large pliable sealing surface and ensures a long lasting water tight connection
- **8-sided pneumatic crimp** provides greater dependability for reliable nut-to-hose connections
- **No Lead**

**Operating Specifications:**

**Temperature:** 40°- 140° F, intermittent to 180° F  
**Pressure:** 125 PSI maximum

**Tubing Diameter:** 0.300" I.D. (0.500" O.D.)

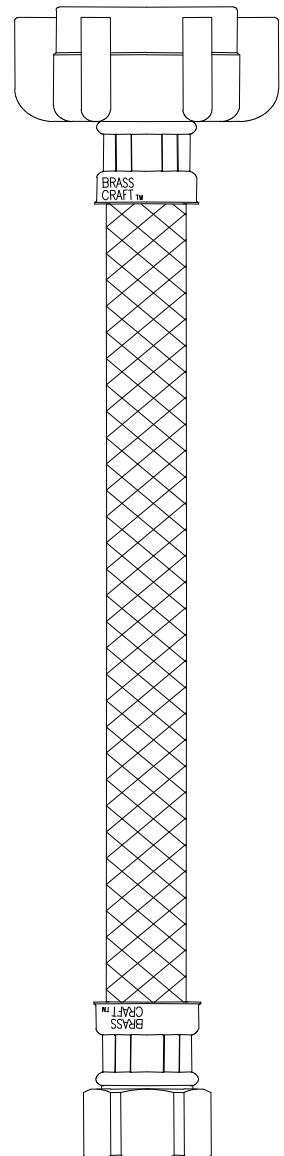

**MATERIAL SPECIFICATIONS**

<b>Hose</b>	PVC with polyester braid reinforcement
<b>Barb</b>	Compliant brass
<b>Ferrule</b>	Zinc plated 1008 steel
<b>Nut</b>	Polypropylene or chrome-plated C36000 brass*
<b>Washer</b>	Rubber
<b>Flare Nut</b>	C36000 brass, chrome plated

\*Where Specified


**Part Listing:**

- VF1-12A F                    3/8" flare x 1/2" FIP x 12" length
- VF1-12AM F                3/8" flare x 1/2" FIP metal nut x 12" length
- VF1-20A F                    3/8" flare x 1/2" FIP x 20" length
- VF1-20AM F                3/8" flare x 1/2" FIP metal nut x 20" length
- VF3-20A F                    1/2" flare x 1/2" FIP x 20" length

*This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.*



# VF1-\*\*-A / VF3-\*\*-A Speedi Plumb® Vinyl Faucet Connector – Flare Inlet

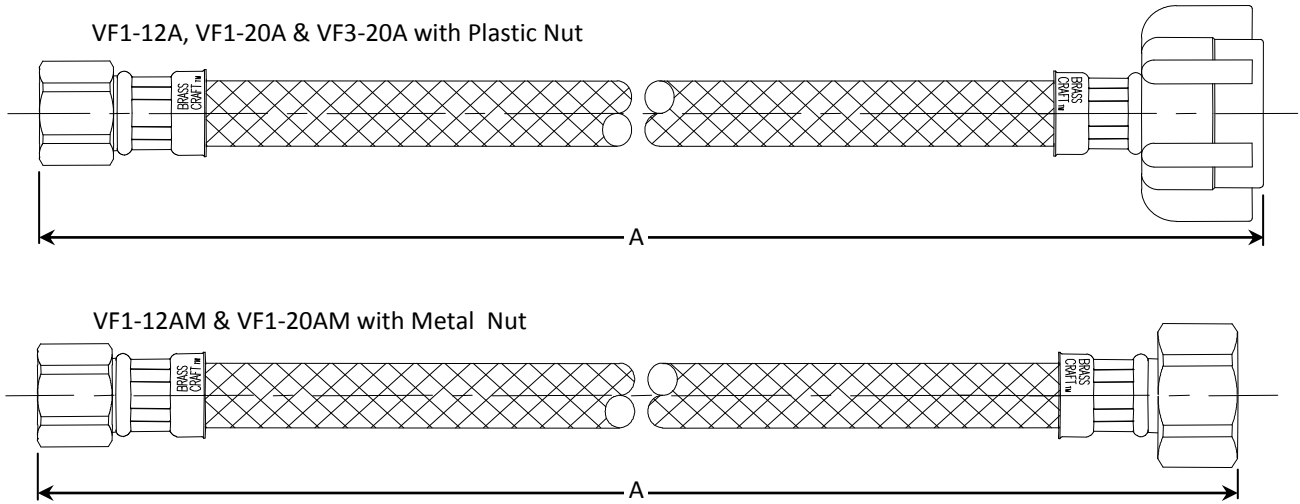

**Listings & Certifications:**

- IAPMO listed to ASME A112.18.6-2003 (File # 0452)
- CSA listed to ASME A112.18.6-2003 / CSA B125 (File # 204593)
- CSA approved to California Health & Safety Code 116875 and Vermont Bill S.152 (Project # 2174785)

<b>PART DIMENSIONS (Inches)</b>	
<b>Model</b>	<b>DIM. A</b>
VF1-12A	12.0 / 13.0
VF1-12AM	12.0 / 13.0
VF1-20A	20.0 / 21.0
VF1-20AM	20.0 / 21.0
VF3-20A	20.0 / 21.0



*This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.*

**BrassCraft®**