


Submitted Model No.:

Specific Features:

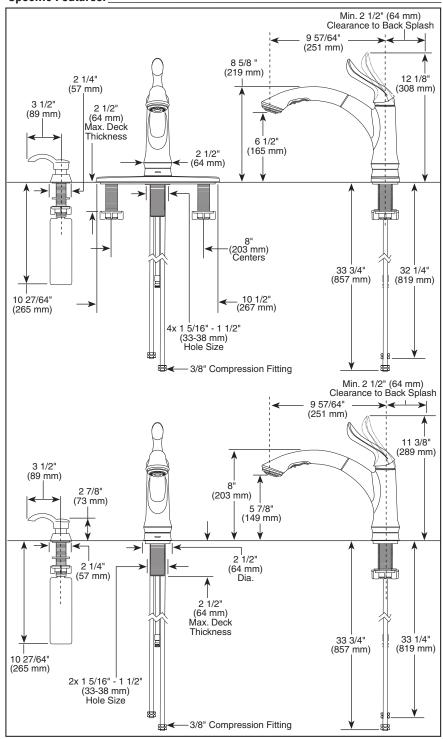

▲ Designate Proper Finish Suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

KITCHEN FAUCETS

- Linden[™] Series
- Single Handle Deck Mount
- 1, 2, 3 or 4 Hole Sink Applications
- Optional Soap Dispenser
- DIAMOND Seal® Technology
- Integrated Supply Tubes
- 2-Function Pull-Out W/ MultiFlow
- Touch₂O® Technology

STANDARD SPECIFICATIONS:

- Single handle kitchen faucets for exposed mounting on 1, 2, 3 and 4 hole sinks.
- Centermount or 8" (203 mm) centers with optional 10 1/2 (267 mm) long escutcheon included.
- 8 5/8" (219 mm) high, 9 57/64" (251 mm) long spout nestled in metal hub assembly, swings 120°.
- Spout is connected to valve body with a 53" (1346 mm) long hose.
- Pull-out spout operates in an aerated or spray mode via an easy push button.
- Sprayhead includes Multi-Flow™ feature which allows for a temporary flow rate increase to 2.0 gpm.
- Lever handle returns to neutral position when valve is turned off.
- Control mechanism is the diamond coated ceramic cartridge.
- Red/blue graphics on handle button to indicate hot/cold temperature.
- Touch-Clean® sprayhead.
- 3/8" O.D. straight, staggered pex supply tubes 32 1/4" (819 mm) and 33 3/4" (857 mm) long.
- Standard 3/8" (10 mm) compression gasket fittings.
- Integral double check valves in spout.
- Soap dispenser bottle holds up to 8 oz.
- Delta Touch₂O® Technology controls water flow.
- On-Off indicator light signals when batteries are low.

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.




ASME A112.18.1 / CSA B125.1

■ ASME A112.18.6

Indicates compliance to ICC/ANSI A117.1

 Verified compliant with .25% weighted average Pb content regulations.





55 E. 111th Street, Indianapolis, Indiana 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 © 2013 Masco Corporation of Indiana